Kitchen Privacy Screen — Proposal (rev. 9)

Prepared for **Bill** · Cornelius, NC · November 10, 2026 · valid for 30 days · two material options, same design

Scope (both options)

- 22'-1" long, **8'-0" tall** horizontal privacy screen with pergola top, finished on both sides, following the reference image.
- **7 clad posts** (treated-pine core + wood cladding) at 3'-7 1/4" on center, clear bay 3'-1 3/4". Core: **treated pine 4x6**, set with its 5 1/2" side across the fence, **embedded 36"** in Ø16" concrete footings over 6" of gravel (holes dug with a rented mini skid steer and auger). Above grade each post is clad with 2x6 faces and 1" side boards, 5 1/2" wide with flush faces.
- **24 slats per bay** (2x2, about 2" gaps), held in notched side boards: even spacing, no visible fasteners on the slats.
- **Pergola top (2x lumber):** 2x8 beams on both sides, **bolted straight to the post cores** with 4 x 1/2" thru-bolts per post (the face boards end under the beams), angled beam ends (no end caps), and **13 2x6 rafters** with cloud-lift ends at each post and mid-bay, set in notches in the beams.
- Solid wood only, **no composite**; all lumber planed on 4 sides (S4S). Coated trim-head deck screws (hidden) and galvanized thru-bolts.
- All visible parts are pre-cut and eased in our shop to keep on-site work short. Cleanup and debris removal included.

Comparison

	Option A — cedar	Option B — treated pine
Material	Cedar on all visible parts; treated-pine core	100% treated pine (S4S)
Finish / maintenance	Natural, no stain needed	Stain after drying (included, 2nd visit)
Materials	$4,114	$2,615
Labor (shop + site)	$3,316 (55 h)	$3,976 (66 h)
Service fee	$150	$150
Total	**$7,580**	**$6,742**

Same structure and dimensions in both options; only the visible wood and the finish change.

Materials and finish

Part	Option A — cedar	Option B — treated pine	Surface	Actual size	Qty
Post core (buried 36")	Pressure-treated Southern Yellow Pine #2 4x6, ground contact (UC4B)	Pressure-treated Southern Yellow Pine #2 4x6, ground contact (UC4B)	S4S	3 1/2" x 5 1/2" x 12' (5 1/2" across the fence)	7
Post faces (house + neighbor)	Western Red Cedar, kiln-dried 2x6	Pressure-treated Southern Yellow Pine #2 2x6	S4S	1 1/2" x 5 1/2" x 6'-10 1/4"	14
Notched side boards	Western Red Cedar, kiln-dried 5/4x6	Pressure-treated Southern Yellow Pine #2 5/4x6 premium	S4S, eased edges	1" x 5 1/2" x 7'-5 1/2"	12
Plain side boards (end posts)	Western Red Cedar, kiln-dried 5/4x6	Pressure-treated Southern Yellow Pine #2 5/4x6 premium	S4S, eased edges	1" x 5 1/2" x 7'-5 1/2"	2
Slats	Western Red Cedar, kiln-dried 2x2	Pressure-treated Southern Yellow Pine #2 2x2	S4S	1 1/2" x 1 1/2" x 3'-3 1/2"	144
Beams (both sides, notched)	Western Red Cedar, kiln-dried 2x8	Pressure-treated Southern Yellow Pine #2 2x8	S4S	1 1/2" x 7 1/4" x 11'-6 1/2"	4
Pergola rafters (cloud-lift ends)	Western Red Cedar, kiln-dried 2x6	Pressure-treated Southern Yellow Pine #2 2x6	S4S	1 1/2" x 5 1/2" x 36"	13

Finish: all lumber is S4S (planed on 4 sides) so faces, side boards and notches line up; no rough-sawn lumber and no composite. Option A cedar is left natural (no stain needed) and weathers to silver-gray; sealer on request. Option B treated pine is delivered wet and moves as it dries: we pick straight boards (KDAT when available) and apply a semi-transparent stain once it has dried.
Material prices may vary with supplier stock and availability at the time of purchase; final material cost is confirmed when the order is placed.

Option A — cedar

Materials (incl. 8.25% Mecklenburg sales tax and equipment rental $450; subject to stock availability)	$4,114
Labor — shop pre-cutting 31 h + on-site installation 24 h (55 h × $60/h)	$3,316
Service fee	$150
Total Option A	**$7,580**

Option B — pressure-treated pine

Materials (incl. 8.25% Mecklenburg sales tax and equipment rental $450; subject to stock availability)	$2,615
Labor — shop pre-cutting 31 h + on-site installation 35 h (66 h × $60/h)	$3,976
Service fee	$150
Total Option B	**$6,742**

Optional extra (not included)

Landscaping strip along the neighbor side (22 ft): landscape fabric, edging and river rock border: **$351** (materials + labor), either option.


Installation sequence

1. Holes (machine auger), Ø16" x 42"
2. Posts: treated-pine 4x6 cores, 36" deep in concrete
3. Level post tops
4. Notched side boards (pre-cut), from the neighbor side
5. Slats (pre-cut)
6. Front closure: face boards, ending under the beams
7. Side closure (end posts)
8. Beams (pre-notched), bolted straight to the cores (4 x 1/2" thru-bolts per post)
9. Pergola rafters (pre-cut), posts + mid-bay

Notes, exclusions and payment


- **Material pricing:** based on current Lowe's / Home Depot pricing and lumber-yard estimates; **material cost may vary depending on stock availability** (species, grade, S4S sizes and lengths, substitutions). Final material cost is confirmed when the order is placed; changes above 5% will be reviewed with you before purchasing.
- Not included: landscaping strip (optional above), permits/HOA fees, surveys, rock or root removal beyond normal digging, plants/vines. We will call NC811 before digging.
- Payment: 40% deposit to order materials and start shop work · 40% when posts and slats are installed · 20% on completion.

Drawings follow: Option A (cedar) sheets A-1 to A-3, then Option B (treated pine) sheets B-1 to B-3.

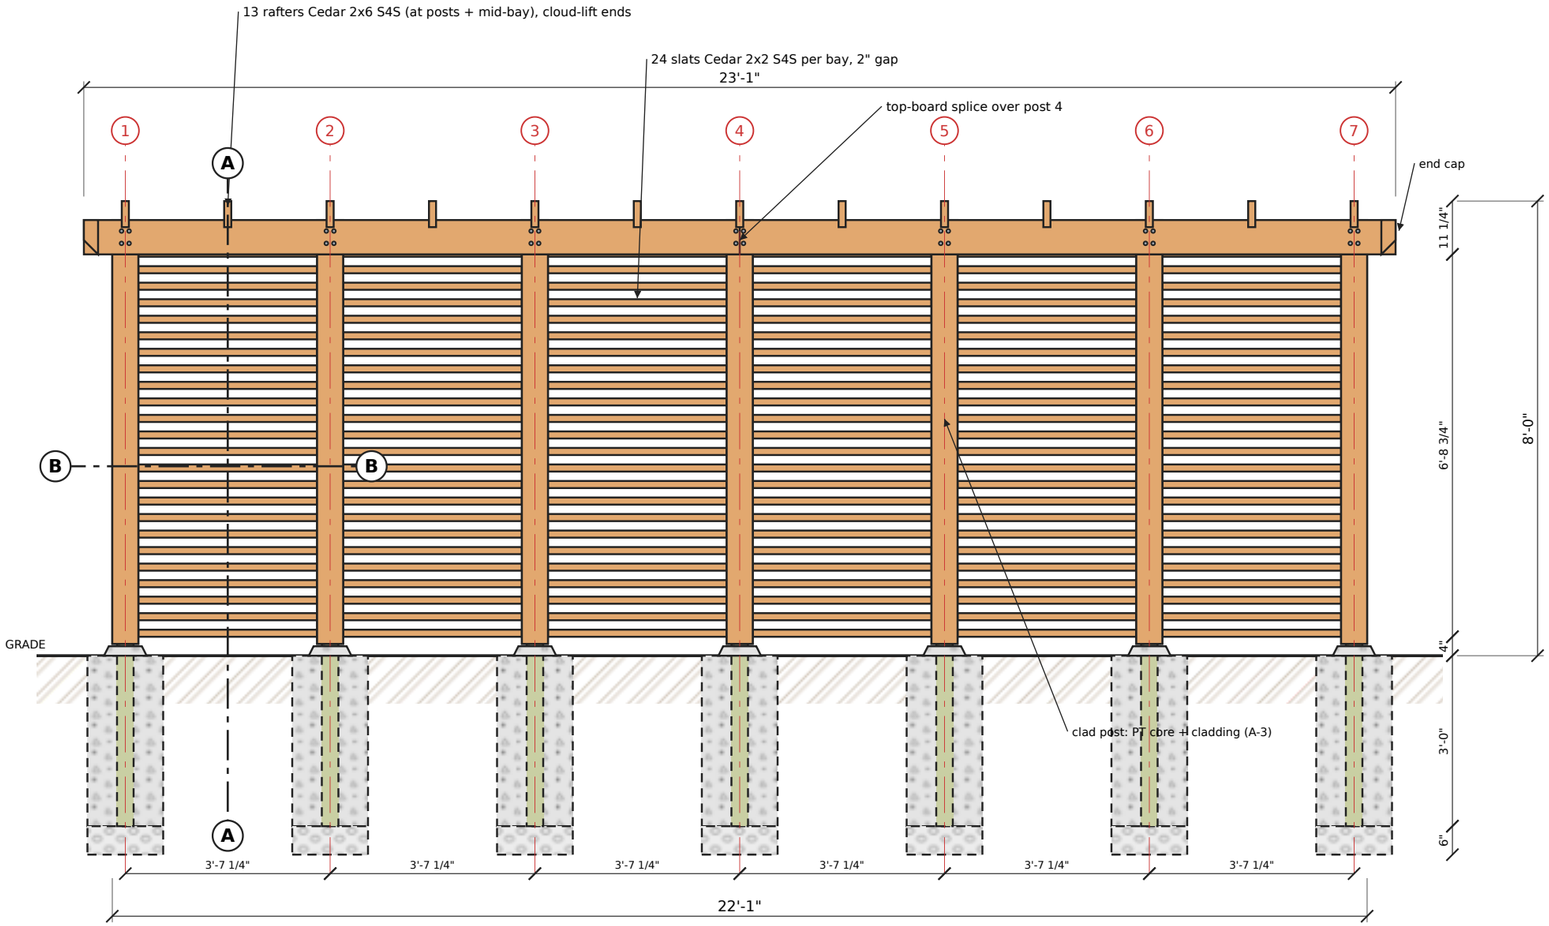


ELEVATION — NEIGHBOR SIDE

SCALE 1:32 (3/8" = 1'-0")

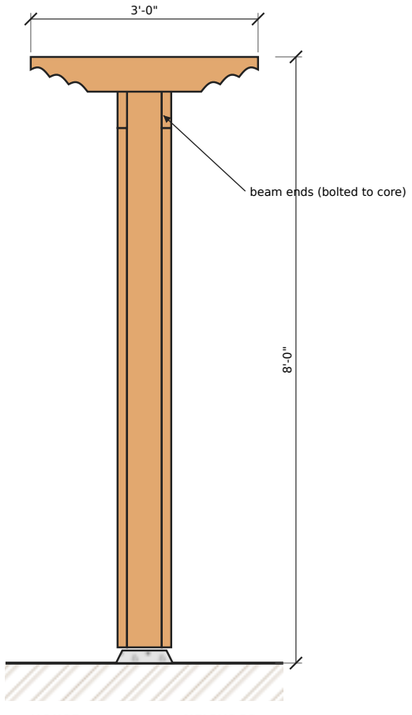

SIDE ELEVATION (end view)

SCALE 1:24 (1/2" = 1'-0")

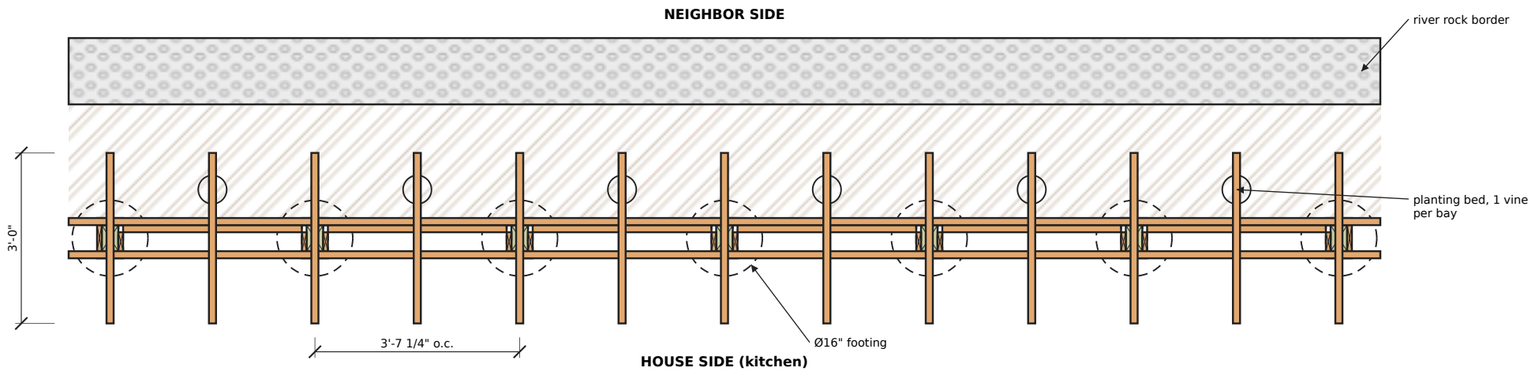

PLAN — TOP VIEW

SCALE 1:32 (3/8" = 1'-0")

NOTES

1. Overall length 22'-1"; 7 posts at 3'-7 1/4" o.c.; clear bay 3'-1 3/4".
2. Bay/post = 6.86 ≈ φ^4 (Fibonacci 89/13); span 3'-1 3/4" > 36" limit (< 48" max).
3. Post cores embedded 3'-0" in concrete over 6" gravel; holes by machine auger.
4. Call NC811 before digging. Verify property line, setbacks and HOA.
5. Fasteners: coated trim-head deck screws (ACQ-rated), countersunk.
6. 24 slats per bay, 2" gap set by the notched side boards.
7. All posts 5 1/2" wide, faces flush. Parts marked YES are pre-cut in the shop.
8. Cedar = Western Red Cedar, kiln-dried, S4S (planed 4 sides).
9. PT = Southern Yellow Pine #2, ground contact.

Kitchen Privacy Screen — 7 posts, cedar, 8 ft, pergola top
(Cornelius, NC) — Bill


Elevation and plan

Date: 2026-11-10 Rev.: 9 By:

Dimensions in feet/inches. Lumber: actual sizes (2x6 = 1 1/2" x 5 1/2").


Verify all dimensions in the field before cutting. Not a structural design.

A-1

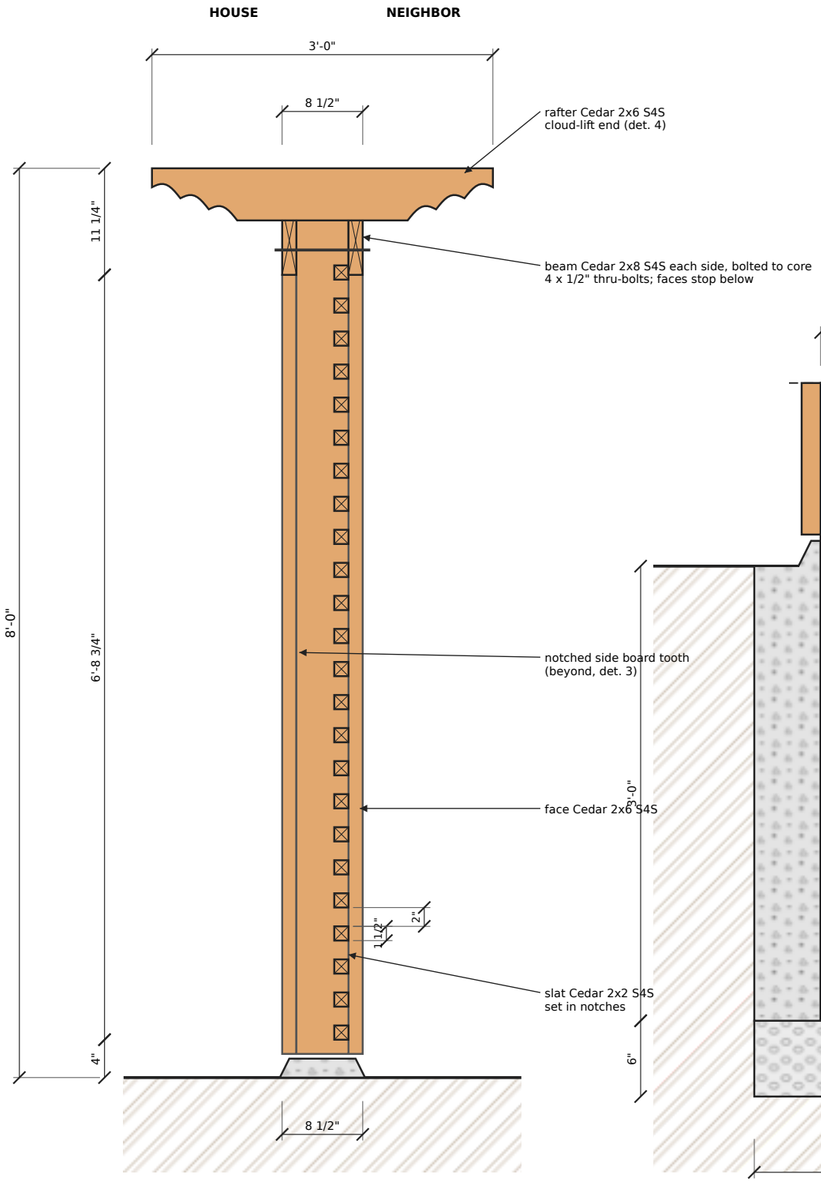


SECTION A-A (mid-bay, looking at post 1)

SCALE 1:16 (3/4" = 1'-0")

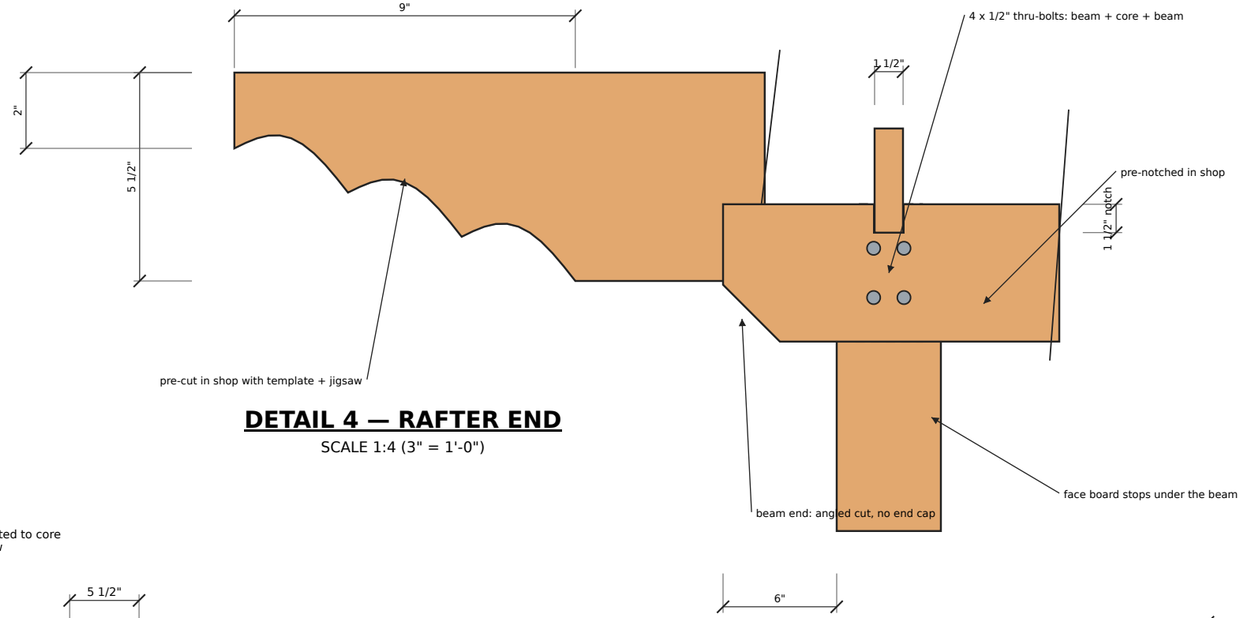


DETAIL 4 — RAFTER END

SCALE 1:4 (3" = 1'-0")

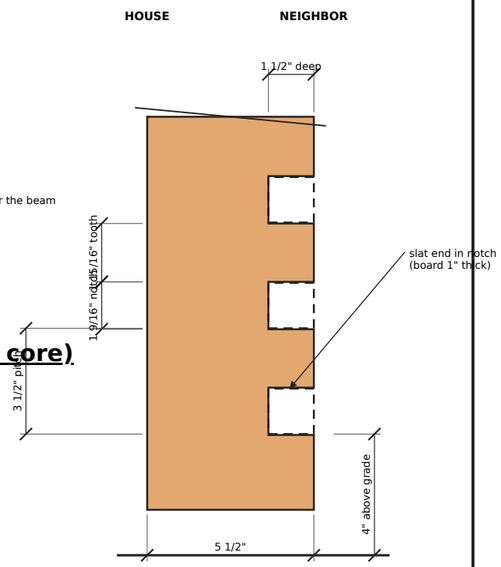

DETAIL 3 — NOTCHED SIDE BOARD (from bay)

SCALE 1:5

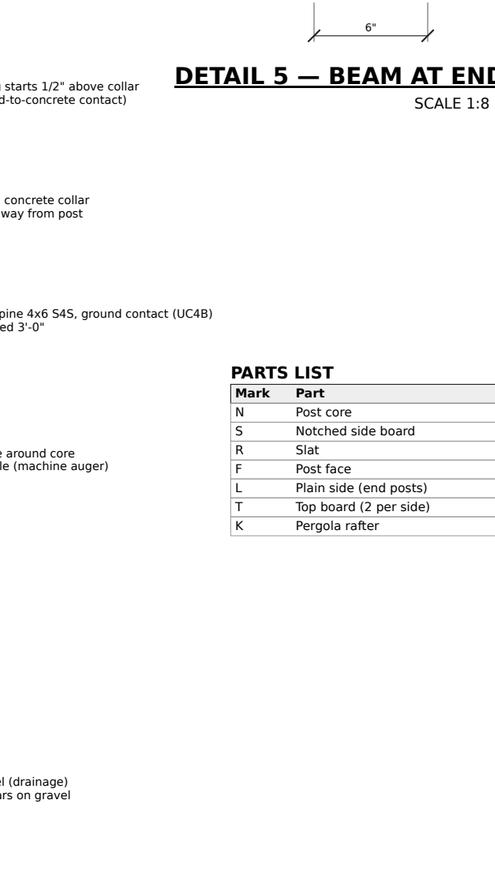

DETAIL 1 — POST FOOTING

SCALE 1:12 (1" = 1'-0")

DETAIL 5 — BEAM AT END POST (bolted to the core)

SCALE 1:8 (1 1/2" = 1'-0")

PARTS LIST

Mark	Part	Material	Qty	Length	Shop pre-cut / notes
N	Post core	PT pine 4x6 S4S, ground contact (UC4B)	7	10'-8"	embed 3'-0"; trim tops on site
S	Notched side board	Cedar 5/4x6 S4S notched	12	7'-5 1/2"	YES: 24 notches
R	Slat	Cedar 2x2 S4S	144	3'-3 1/2"	YES: cut to length (stop block)
F	Post face	Cedar 2x6 S4S	14	6'-10 1/4"	YES: cut to length (stops under beam)
L	Plain side (end posts)	Cedar 5/4x6 S4S plain	2	7'-5 1/2"	YES: cut to length
T	Top board (2 per side)	Cedar 2x8 S4S	4	11'-6 1/2"	YES: notches for rafters
K	Pergola rafter	Cedar 2x6 S4S	13	3'-0"	YES: cloud-lift ends

Kitchen Privacy Screen — 7 posts, cedar, 8 ft, pergola top
(Cornelius, NC) — Bill


Sections and details

Date: 2026-11-10 Rev.: 9 By:

Dimensions in feet/inches. Lumber: actual sizes (2x6 = 1 1/2" x 5 1/2").


Verify all dimensions in the field before cutting. Not a structural design.

A-2

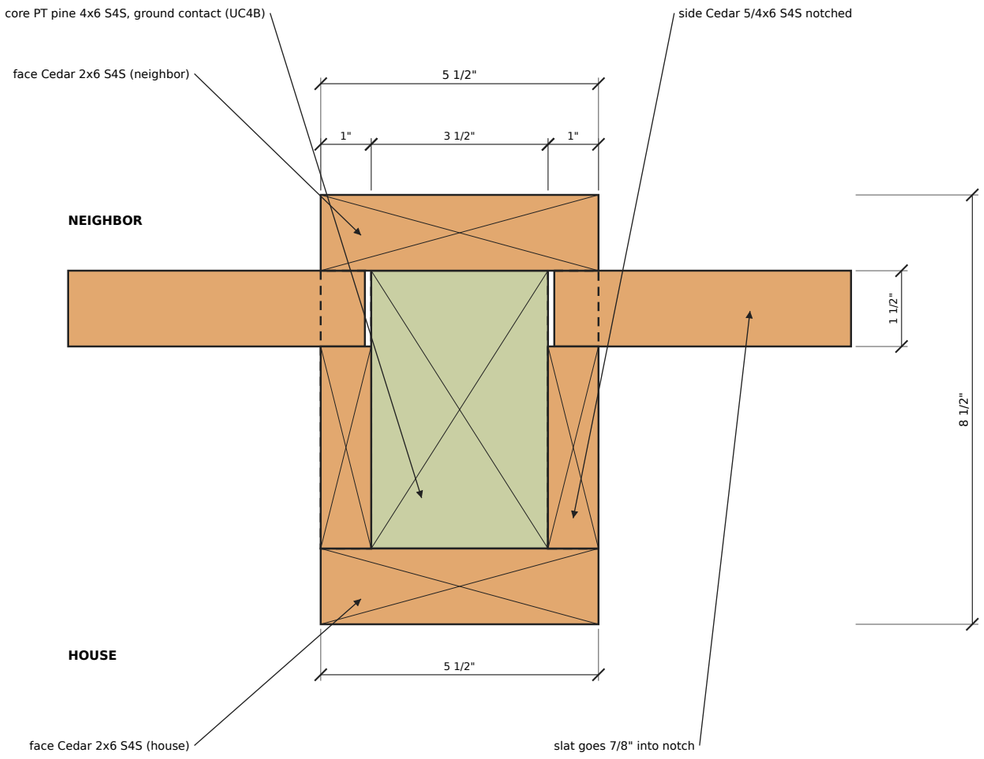

DETAIL 2a — INTERMEDIATE POST, SECTION B-B

SCALE 1:3

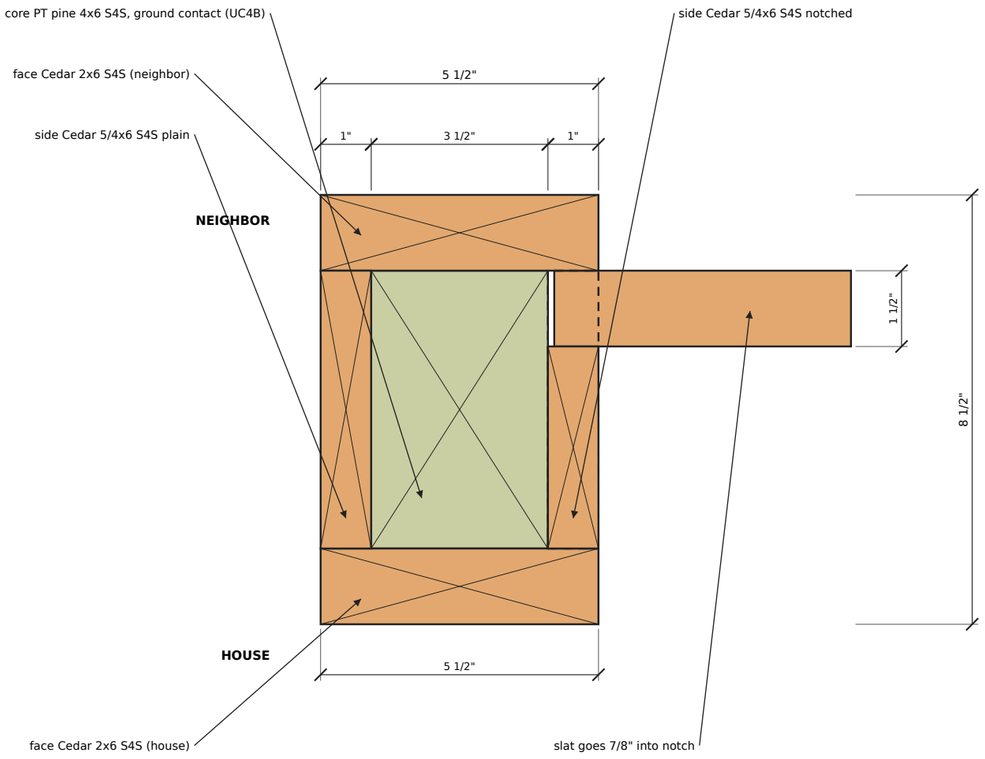

DETAIL 2b — END POST (1 and 7)

SCALE 1:3

#	INSTALLATION SEQUENCE
1	HOLES: lay out 7 post centers at 3'-7 1/4" o.c.; dig Ø16" x 3'-6" with rented machine auger; 6" gravel.
2	POSTS: set PT pine 4x6 S4S, ground contact (UC4B) cores 3'-0" deep, plumb and brace, concrete with sloped collar. Cure 48 h.
3	LEVEL TOPS: cut all cores to 7'-8" above grade (laser level).
4	NOTCHED SIDE BOARDS (pre-cut): fasten to core sides from the neighbor side, notches facing neighbor.
5	SLATS (pre-cut): drop into notches from the neighbor side, bottom to top; 1 screw per end.
6	FRONT CLOSURE: Cedar 2x6 S4S face boards on both faces (closes the notches and locks the slats).
7	SIDE CLOSURE: Cedar 5/4x6 S4S plain on the outer side of end posts 1 and 7.
8	BEAMS (pre-notched): Cedar 2x8 S4S each side, bolted straight to the core above the face boards, 4 x 1/2" thru-bolts per post; splice over post 4.
9	PERGOLA RAFTERS (pre-cut): 13 into top-board notches (posts + mid-bay); hidden trim-head screws.

Kitchen Privacy Screen — 7 posts, cedar, 8 ft, pergola top (Cornelius, NC) — Bill


Clad post (PT core + cladding) and installation

Date: 2026-11-10 Rev.: 9 By:

Dimensions in feet/inches. Lumber: actual sizes (2x6 = 1 1/2" x 5 1/2").


Verify all dimensions in the field before cutting. Not a structural design.

A-3

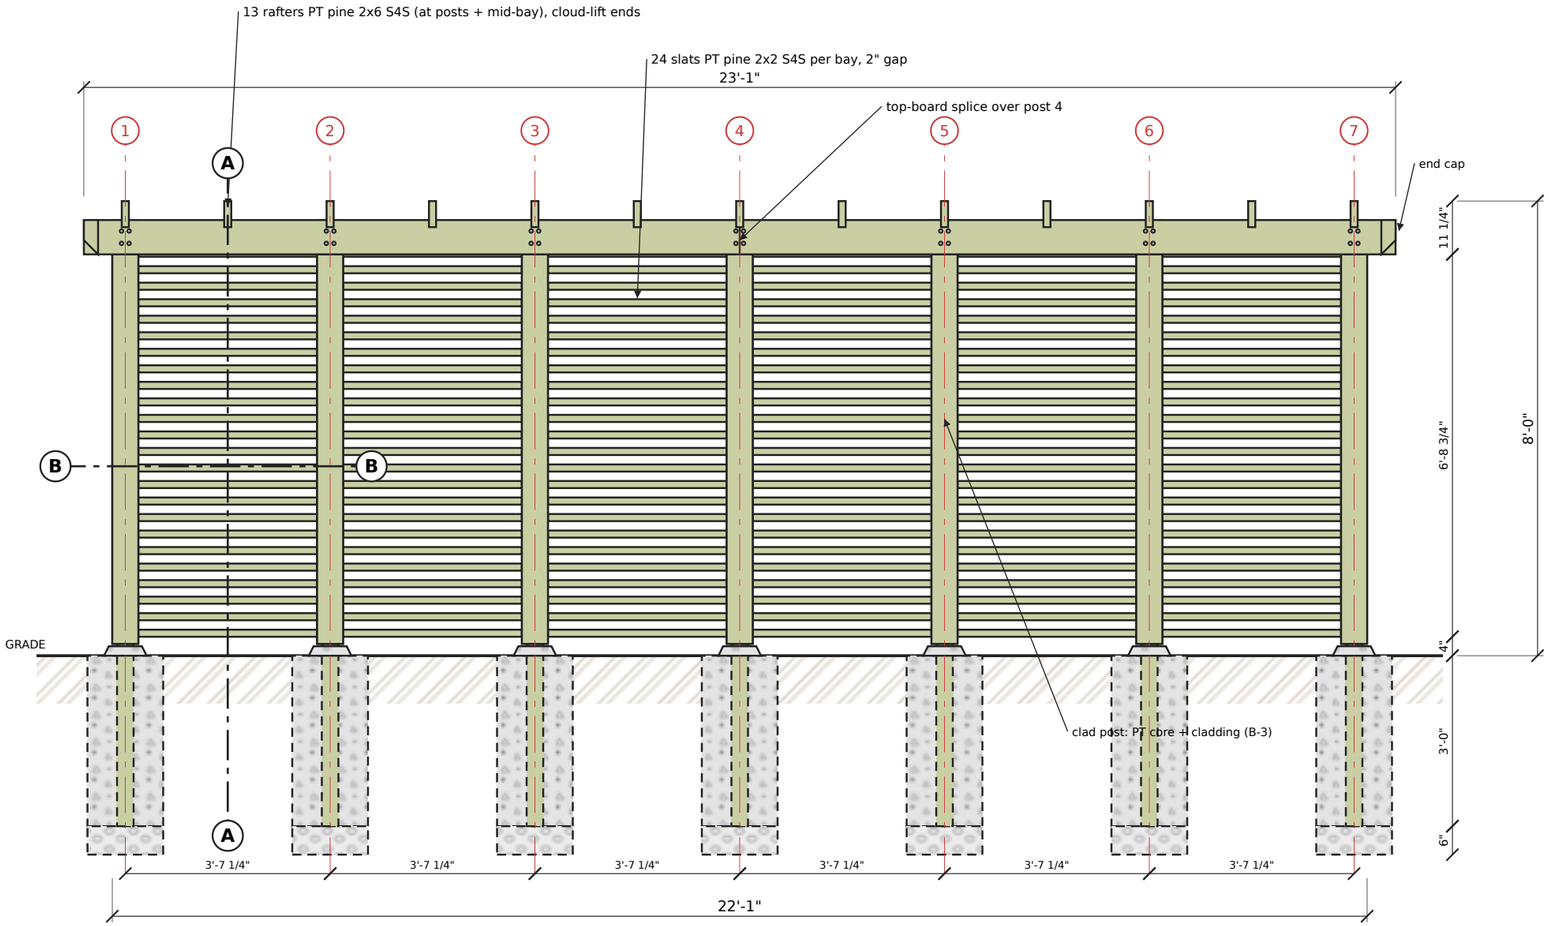


ELEVATION — NEIGHBOR SIDE

SCALE 1:32 (3/8" = 1'-0")

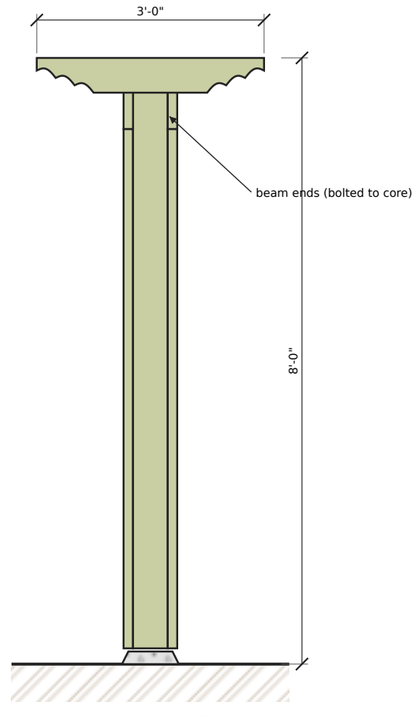

SIDE ELEVATION (end view)

SCALE 1:24 (1/2" = 1'-0")

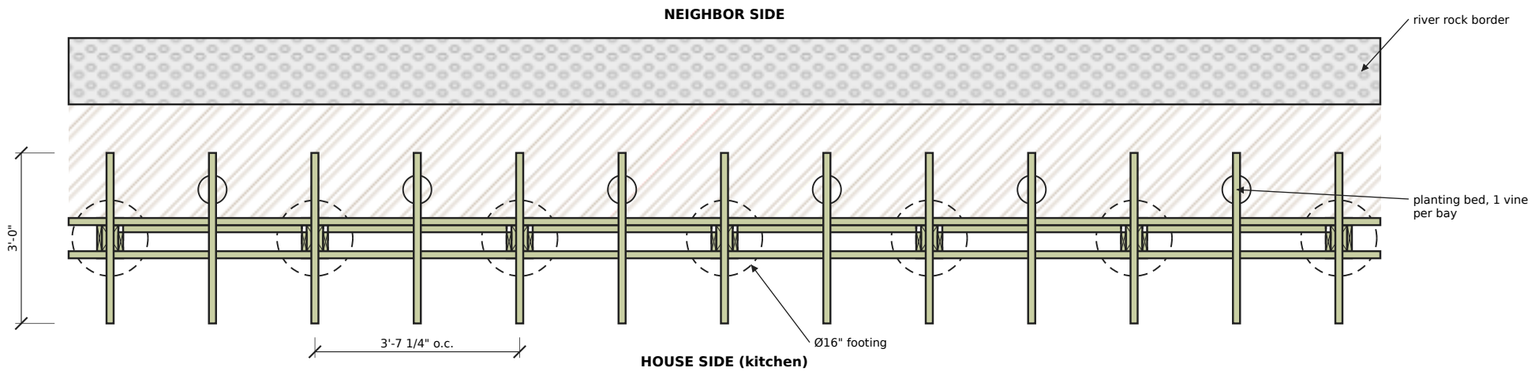

PLAN — TOP VIEW

SCALE 1:32 (3/8" = 1'-0")

NOTES

1. Overall length 22'-1"; 7 posts at 3'-7 1/4" o.c.; clear bay 3'-1 3/4".
2. Bay/post = 6.86 ≈ φ^4 (Fibonacci 89/13); span 3'-1 3/4" > 36" limit (< 48" max).
3. Post cores embedded 3'-0" in concrete over 6" gravel; holes by machine auger.
4. Call NC811 before digging. Verify property line, setbacks and HOA.
5. Fasteners: coated trim-head deck screws (ACQ-rated), countersunk.
6. 24 slats per bay, 2" gap set by the notched side boards.
7. All posts 5 1/2" wide, faces flush. Parts marked YES are pre-cut in the shop.
8. All lumber: Southern Yellow Pine #2, pressure-treated, S4S; cores ground contact (UC4B).

Kitchen Privacy Screen — 7 posts, pressure-treated pine, 8 ft, pergola top (Cornelius, NC) — Bill


Elevation and plan

Date: 2026-11-10 Rev.: 9 By:

Dimensions in feet/inches. Lumber: actual sizes (2x6 = 1 1/2" x 5 1/2").


Verify all dimensions in the field before cutting. Not a structural design.

B-1

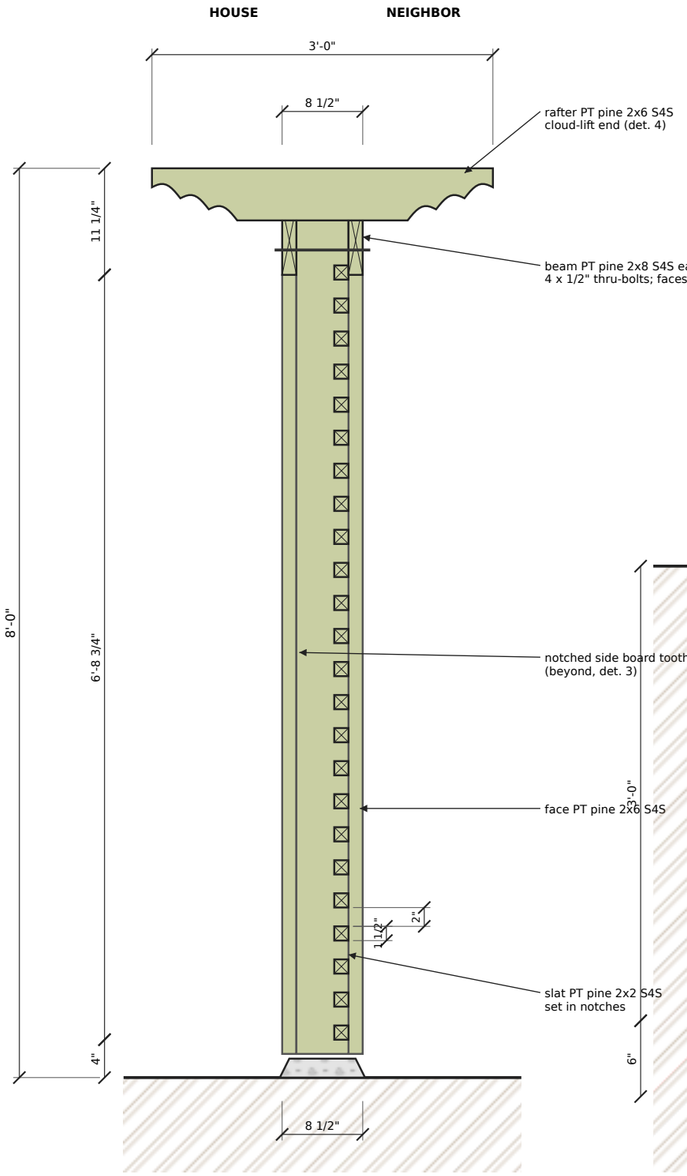


SECTION A-A (mid-bay, looking at post 1)

SCALE 1:16 (3/4" = 1'-0")

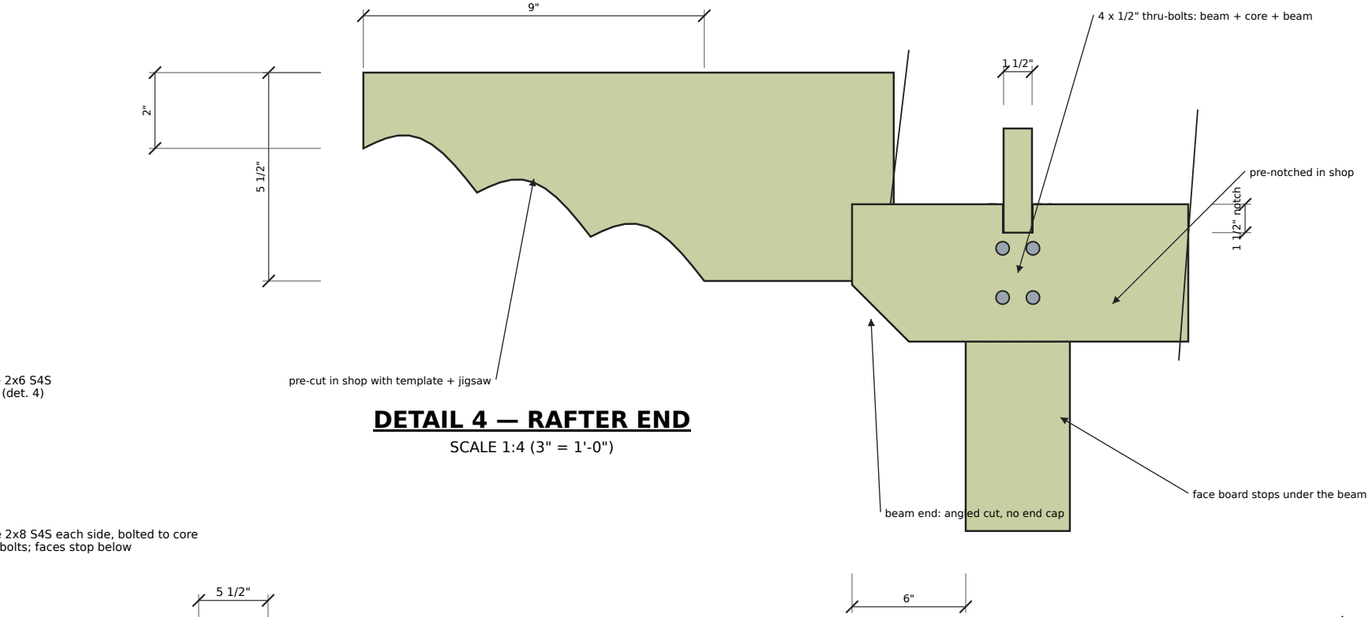


DETAIL 4 — RAFTER END

SCALE 1:4 (3" = 1'-0")

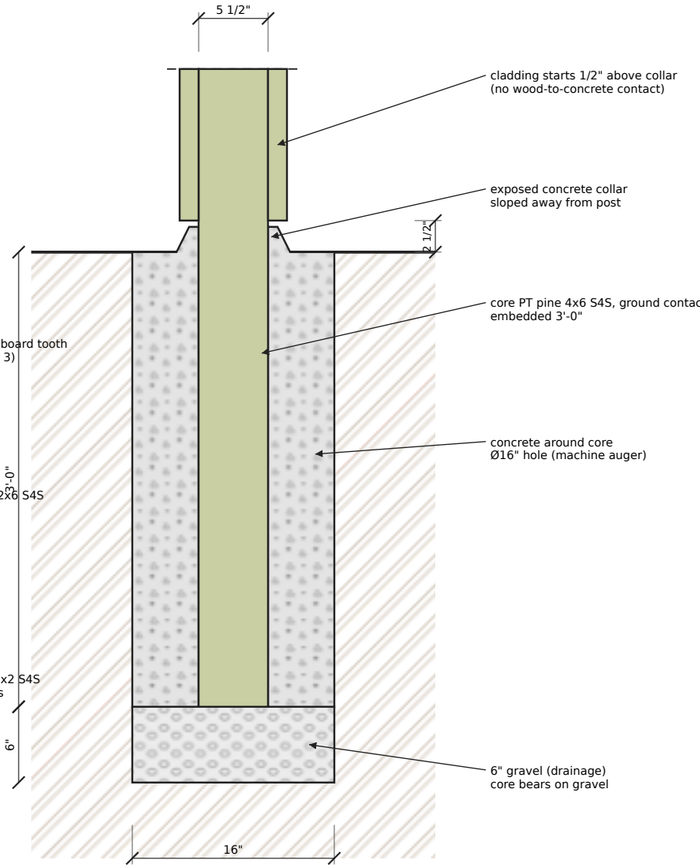

DETAIL 1 — POST FOOTING

SCALE 1:12 (1" = 1'-0")

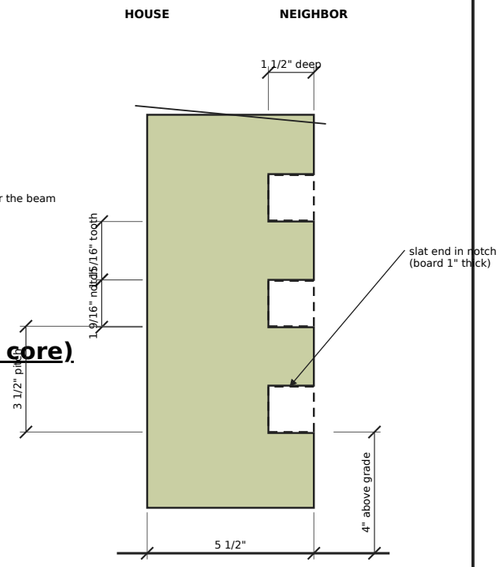

DETAIL 3 — NOTCHED SIDE BOARD (from bay)

SCALE 1:5

DETAIL 5 — BEAM AT END POST (bolted to the core)

SCALE 1:8 (1 1/2" = 1'-0")

PARTS LIST

Mark	Part	Material	Qty	Length	Shop pre-cut / notes
N	Post core	PT pine 4x6 S4S, ground contact (UC4B)	7	10'-8"	embed 3'-0"; trim tops on site
S	Notched side board	PT pine 5/4x6 S4S notched	12	7'-5 1/2"	YES: 24 notches
R	Slat	PT pine 2x2 S4S	144	3'-3 1/2"	YES: cut to length (stop block)
F	Post face	PT pine 2x6 S4S	14	6'-10 1/4"	YES: cut to length (stops under beam)
L	Plain side (end posts)	PT pine 5/4x6 S4S plain	2	7'-5 1/2"	YES: cut to length
T	Top board (2 per side)	PT pine 2x8 S4S	4	11'-6 1/2"	YES: notches for rafters
K	Pergola rafter	PT pine 2x6 S4S	13	3'-0"	YES: cloud-lift ends

Kitchen Privacy Screen — 7 posts, pressure-treated pine, 8 ft, pergola top (Cornelius, NC) — Bill


Sections and details

Date: 2026-11-10 Rev.: 9 By:

Dimensions in feet/inches. Lumber: actual sizes (2x6 = 1 1/2" x 5 1/2").


Verify all dimensions in the field before cutting. Not a structural design.

B-2

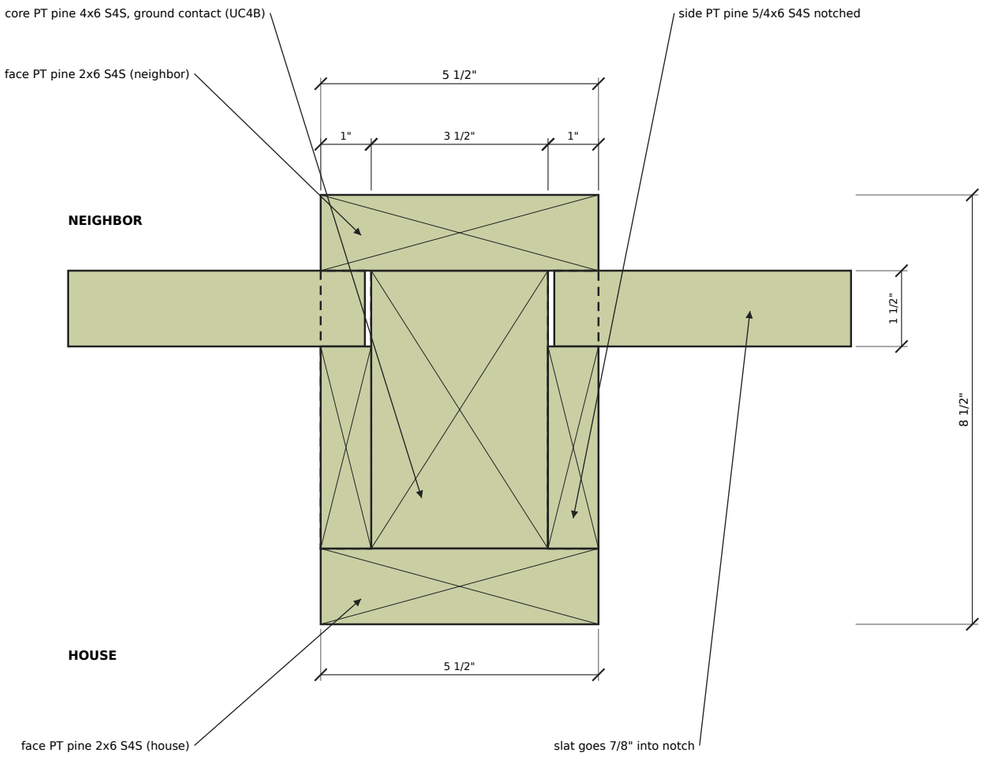

DETAIL 2a — INTERMEDIATE POST, SECTION B-B

SCALE 1:3

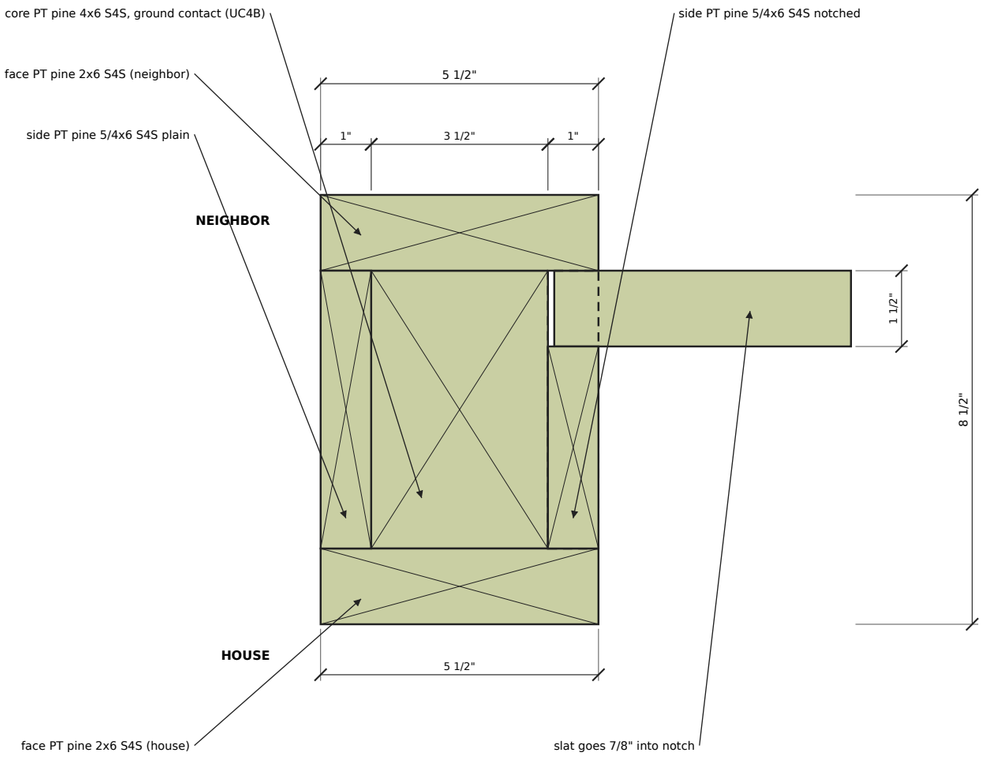

DETAIL 2b — END POST (1 and 7)

SCALE 1:3

#	INSTALLATION SEQUENCE
1	HOLES: lay out 7 post centers at 3'-7 1/4" o.c.; dig Ø16" x 3'-6" with rented machine auger; 6" gravel.
2	POSTS: set PT pine 4x6 S4S, ground contact (UC4B) cores 3'-0" deep, plumb and brace, concrete with sloped collar. Cure 48 h.
3	LEVEL TOPS: cut all cores to 7'-8" above grade (laser level).
4	NOTCHED SIDE BOARDS (pre-cut): fasten to core sides from the neighbor side, notches facing neighbor.
5	SLATS (pre-cut): drop into notches from the neighbor side, bottom to top; 1 screw per end.
6	FRONT CLOSURE: PT pine 2x6 S4S face boards on both faces (closes the notches and locks the slats).
7	SIDE CLOSURE: PT pine 5/4x6 S4S plain on the outer side of end posts 1 and 7.
8	BEAMS (pre-notched): PT pine 2x8 S4S each side, bolted straight to the core above the face boards, 4 x 1/2" thru-bolts per post; splice over post 4.
9	PERGOLA RAFTERS (pre-cut): 13 into top-board notches (posts + mid-bay); hidden trim-head screws.

Kitchen Privacy Screen — 7 posts, pressure-treated pine, 8 ft, pergola top (Cornelius, NC) — Bill

Clad post (PT core + cladding) and installation

Date: 2026-11-10 Rev.: 9 By:

Dimensions in feet/inches. Lumber: actual sizes (2x6 = 1 1/2" x 5 1/2").

Verify all dimensions in the field before cutting. Not a structural design.

B-3