Kitchen Privacy Screen — Proposal (rev. 9.1)

Prepared for **Bill** · Cornelius, NC · November 11, 2026 · valid for 30 days · cedar, stained & sealed

> **What changed since rev. 9:** as requested, the cedar option now includes **staining and sealing all exposed cedar on both sides, including the pergola top**. Total: $7,580 → **$8,347** (+$767). Design and dimensions are unchanged.

Scope

- 22'-1" long, **8'-0" tall** horizontal privacy screen with pergola top, finished on both sides, following the reference image.
- **7 clad posts** (treated-pine core + cedar cladding) at 3'-7 1/4" on center, clear bay 3'-1 3/4". Core: **treated pine 4x6**, set with its 5 1/2" side across the fence, **embedded 36"** in Ø16" concrete footings over 6" of gravel (holes dug with a rented mini skid steer and auger). Above grade each post is clad with cedar 2x6 faces and 1" side boards, 5 1/2" wide with flush faces.
- **24 cedar slats per bay** (2x2, about 2" gaps), held in notched side boards: even spacing, no visible fasteners on the slats.
- **Pergola top:** cedar 2x8 beams on both sides, **bolted straight to the post cores** with 4 x 1/2" thru-bolts per post (the face boards end under the beams), angled beam ends (no end caps), and **13 cedar 2x6 rafters** with cloud-lift ends at each post and mid-bay, set in notches in the beams.
- **Stain & sealer on all cedar** (faces, side boards, slats, beams and rafters), both sides: Ready Seal, color Natural Cedar. Details below.
- Solid wood only, **no composite**; all lumber planed on 4 sides (S4S). Coated trim-head deck screws (hidden) and galvanized thru-bolts.
- All visible parts are pre-cut, eased and finished in our shop to keep on-site work short. Cleanup and debris removal included.

Price

Materials (incl. stain & sealer, 8.25% Mecklenburg sales tax and equipment rental $450; subject to stock availability)	$4,426
Labor — shop pre-cutting and finishing 37 h + on-site installation 26 h (63 h × $60/h)	$3,771
Service fee	$150
Total	**$8,347**

Finish — stain & sealer

Product	**Ready Seal Exterior Stain & Sealer for Wood**: oil-based, semi-transparent penetrating stain and sealer in one product (no separate sealer coat; no surface film to peel)
Color	**Natural Cedar (#512)**: warm natural cedar tone that keeps the grain visible. Other colors in the same line at the same price on request (e.g. Light Oak, Pecan).
Where	All exposed cedar on both sides: post faces, notched and plain side boards, all 144 slats, both beams and all 13 pergola rafters (about 597 sq ft of wood surface). The treated-pine core is hidden and is not stained.
Application	Sprayed in the shop on all four sides of every piece before assembly (hidden faces are protected too, which helps the boards stay straight), saturating coat applied wet-on-wet; on-site touch-up after installation. Applied above 50°F, in dry weather.
Quantity	One 5-gal pail + one 1-gal can (touch-ups and a spare for future maintenance)
Maintenance	Clean and re-coat every 2–3 years, no stripping or sanding needed (same product and color).

Materials

Cut list

Part	Material	Surface	Cut size (thick x wide x long)	Pieces	Stained & sealed
Post core (buried 36")	Pressure-treated Southern Yellow Pine #2 4x6, ground contact (UC4B)	S4S	3 1/2" x 5 1/2" x 10'-9 1/2" (5 1/2" across the fence)	7	No (hidden)
Post faces (house + neighbor)	Western Red Cedar, kiln-dried 2x6	S4S	1 1/2" x 5 1/2" x 6'-10 1/4"	14	Yes
Notched side boards	Western Red Cedar, kiln-dried 5/4x6	S4S, eased edges	1" x 5 1/2" x 7'-5 1/2"	12	Yes
Plain side boards (end posts)	Western Red Cedar, kiln-dried 5/4x6	S4S, eased edges	1" x 5 1/2" x 7'-5 1/2"	2	Yes
Slats	Western Red Cedar, kiln-dried 2x2	S4S	1 1/2" x 1 1/2" x 3'-3 1/2"	144	Yes
Beams (both sides, notched)	Western Red Cedar, kiln-dried 2x8	S4S	1 1/2" x 7 1/4" x 11'-6 1/2"	4	Yes
Pergola rafters (cloud-lift ends)	Western Red Cedar, kiln-dried 2x6	S4S	1 1/2" x 5 1/2" x 36"	13	Yes

Lumber to buy (stock lengths)

Lumber	Stock length	Boards	Used for
PT pine 4x6 #2, ground contact (UC4B)	12'	7	Post cores
Cedar 5/4x6 S4S	12'	15	Notched + plain side boards (includes 5% spare)
Cedar 2x6 S4S	8'	1	Post faces + pergola rafters
Cedar 2x6 S4S	12'	14	Post faces + pergola rafters (includes 5% spare)
Cedar 2x2 S4S	8'	76	Slats (2 per board) (includes 5% spare)
Cedar 2x8 S4S	12'	5	Beams (includes 5% spare)

All lumber is S4S (planed on 4 sides) so faces, side boards and notches line up; no rough-sawn lumber and no composite.
Material prices may vary with supplier stock and availability at the time of purchase; final material cost is confirmed when the order is placed.

Optional extra (not included)

Landscaping strip along the neighbor side (22 ft): landscape fabric, edging and river rock border: **$351** (materials + labor).


Installation sequence

1. Holes (machine auger), Ø16" x 42"
2. Posts: treated-pine 4x6 cores, 36" deep in concrete
3. Level post tops
4. Shop: pre-cut, ease edges and stain/seal all cedar on 4 sides
5. Notched side boards (pre-cut), from the neighbor side
6. Slats (pre-cut)
7. Front closure: face boards, ending under the beams
8. Side closure (end posts)
9. Beams (pre-notched), bolted straight to the cores (4 x 1/2" thru-bolts per post)
10. Pergola rafters (pre-cut), posts + mid-bay
11. Stain touch-up on site (cuts, notches, rafter ends, screw heads)

Notes, exclusions and payment


- **Material pricing:** based on current Lowe's / Home Depot pricing and lumber-yard estimates; **material cost may vary depending on stock availability** (species, grade, S4S sizes and lengths, substitutions). Final material cost is confirmed when the order is placed; changes above 5% will be reviewed with you before purchasing.
- Staining requires dry weather above 50°F; in cold months the shop finishing can be done ahead and the on-site touch-up scheduled on a suitable day.
- Not included: landscaping strip (optional above), permits/HOA fees, surveys, rock or root removal beyond normal digging, plants/vines. We will call NC811 before digging.
- Payment: 40% deposit to order materials and start shop work · 40% when posts and slats are installed · 20% on completion.

Drawings follow: sheets A-1 to A-3 (cedar).

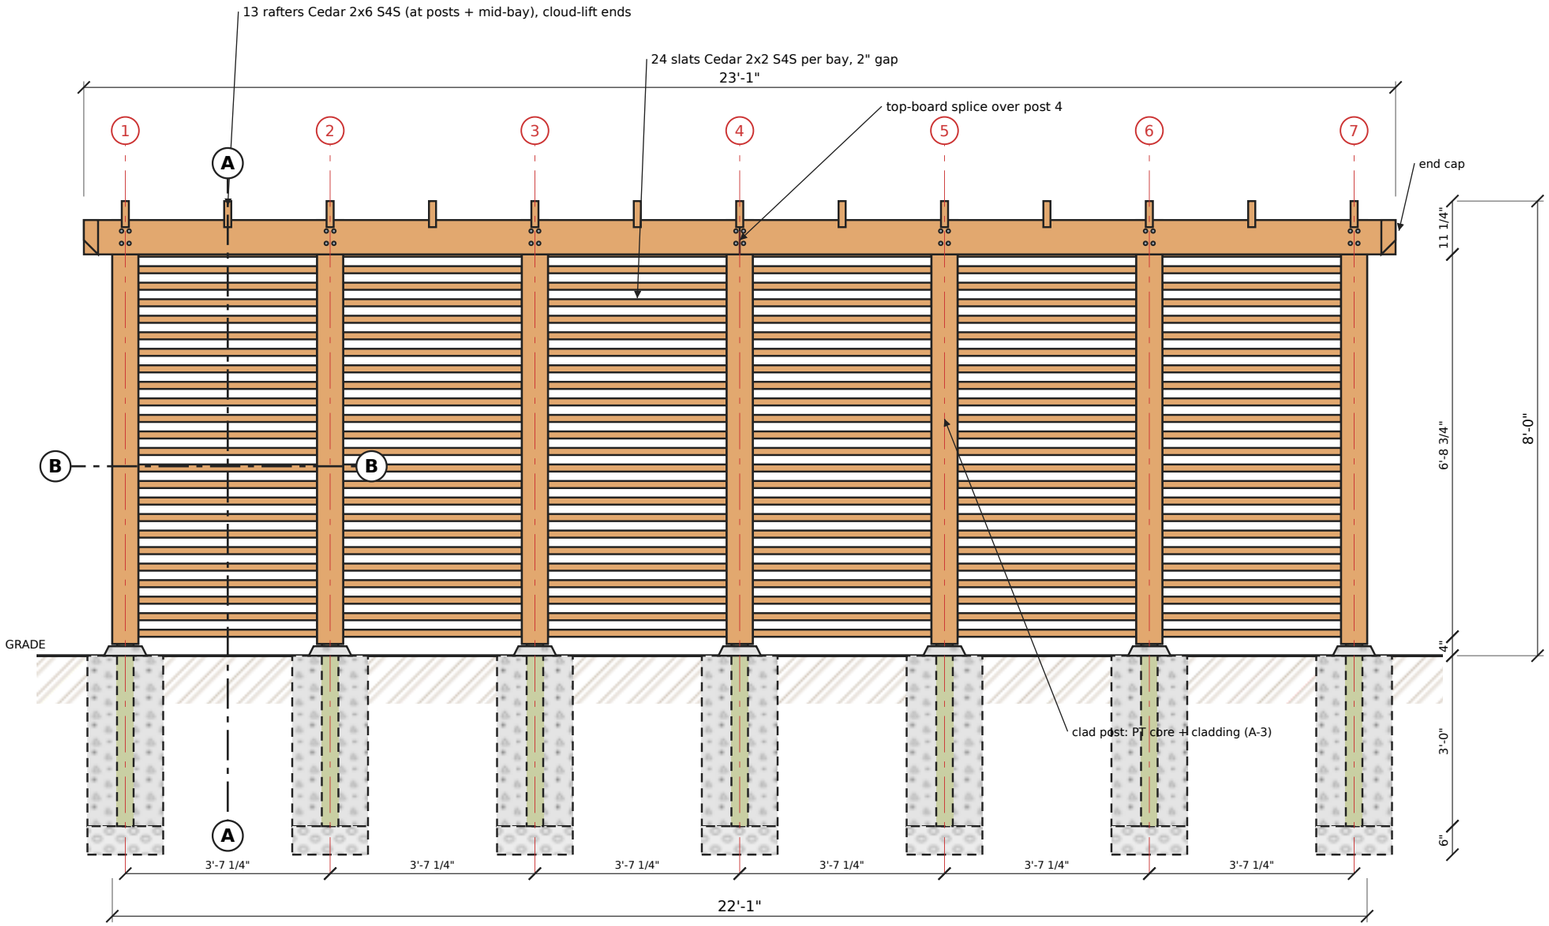


ELEVATION — NEIGHBOR SIDE

SCALE 1:32 (3/8" = 1'-0")

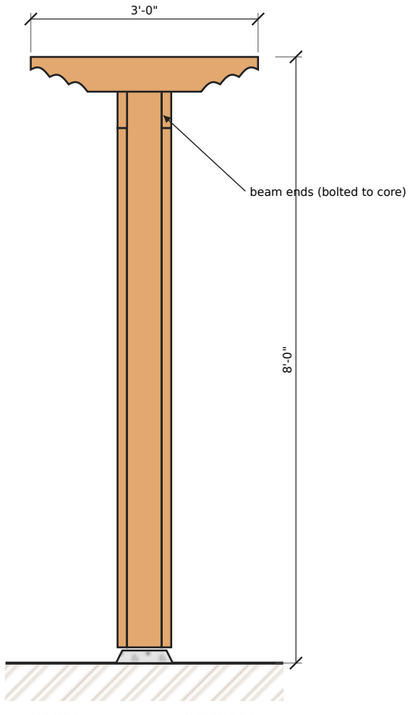

SIDE ELEVATION (end view)

SCALE 1:24 (1/2" = 1'-0")

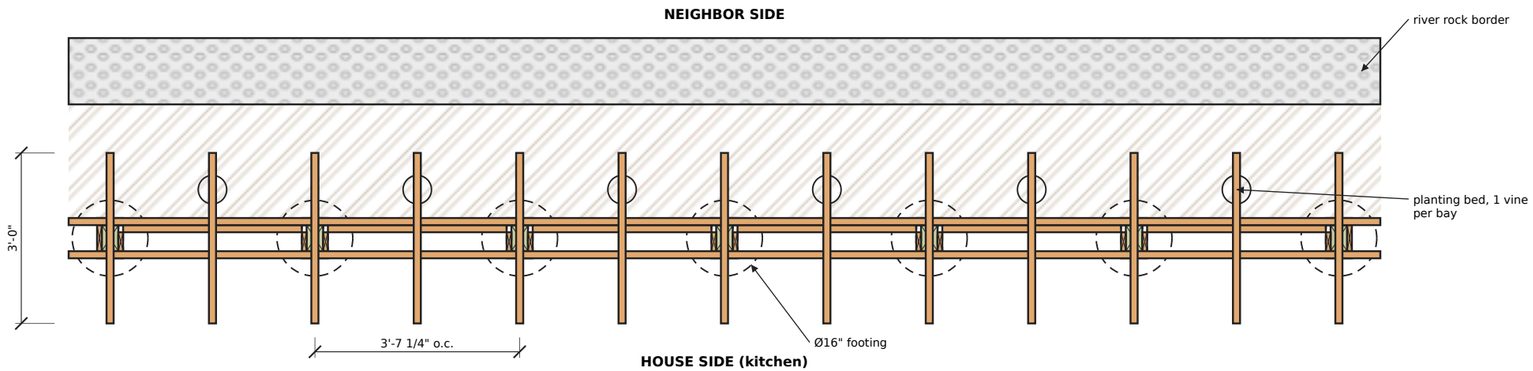

PLAN — TOP VIEW

SCALE 1:32 (3/8" = 1'-0")

NOTES

1. Overall length 22'-1"; 7 posts at 3'-7 1/4" o.c.; clear bay 3'-1 3/4".
2. Bay/post = 6.86 ≈ φ^4 (Fibonacci 89/13); span 3'-1 3/4" > 36" limit (< 48" max).
3. Post cores embedded 3'-0" in concrete over 6" gravel; holes by machine auger.
4. Call NC811 before digging. Verify property line, setbacks and HOA.
5. Fasteners: coated trim-head deck screws (ACQ-rated), countersunk.
6. 24 slats per bay, 2" gap set by the notched side boards.
7. All posts 5 1/2" wide, faces flush. Parts marked YES are pre-cut in the shop.
8. Cedar = Western Red Cedar, kiln-dried, S4S (planed 4 sides).
9. PT = Southern Yellow Pine #2, ground contact.

Kitchen Privacy Screen — 7 posts, cedar, 8 ft, pergola top
(Cornelius, NC) — Bill


Elevation and plan

Date: 2026-11-10 Rev.: 9 By:

Dimensions in feet/inches. Lumber: actual sizes (2x6 = 1 1/2" x 5 1/2").


Verify all dimensions in the field before cutting. Not a structural design.

A-1

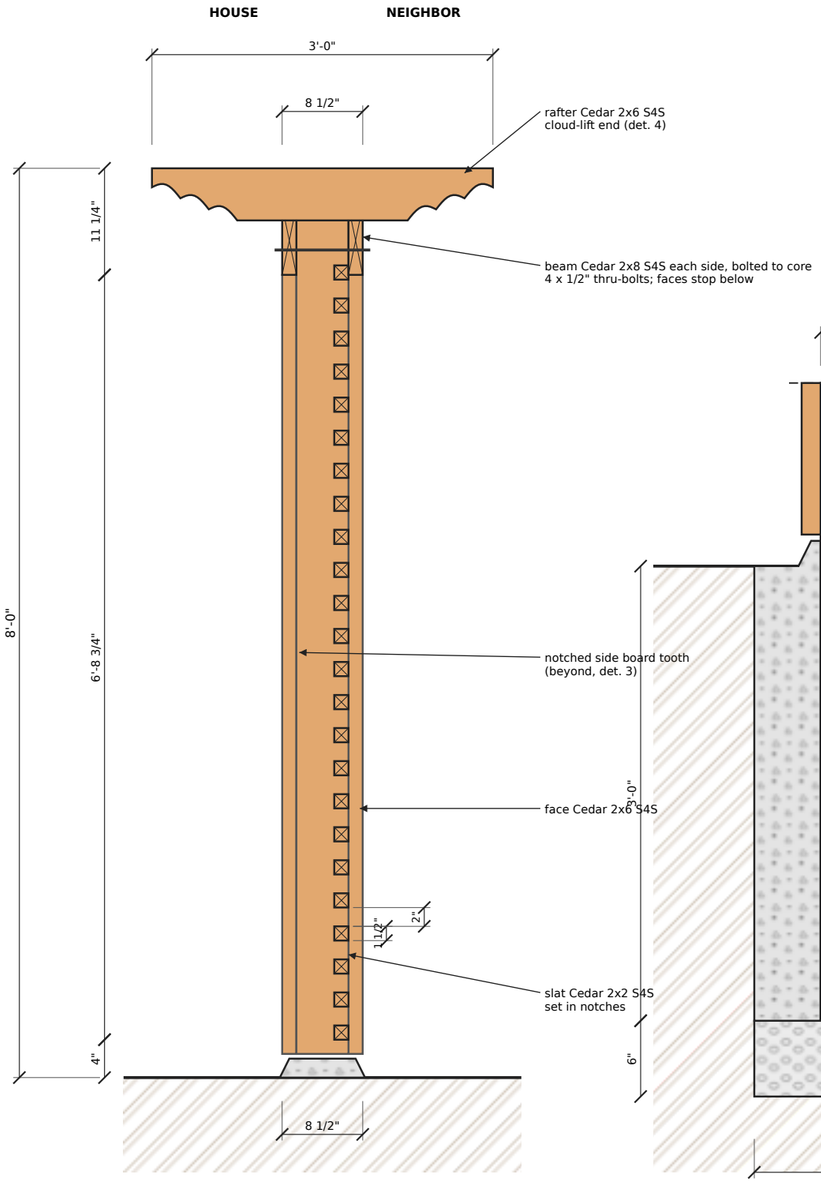


SECTION A-A (mid-bay, looking at post 1)

SCALE 1:16 (3/4" = 1'-0")

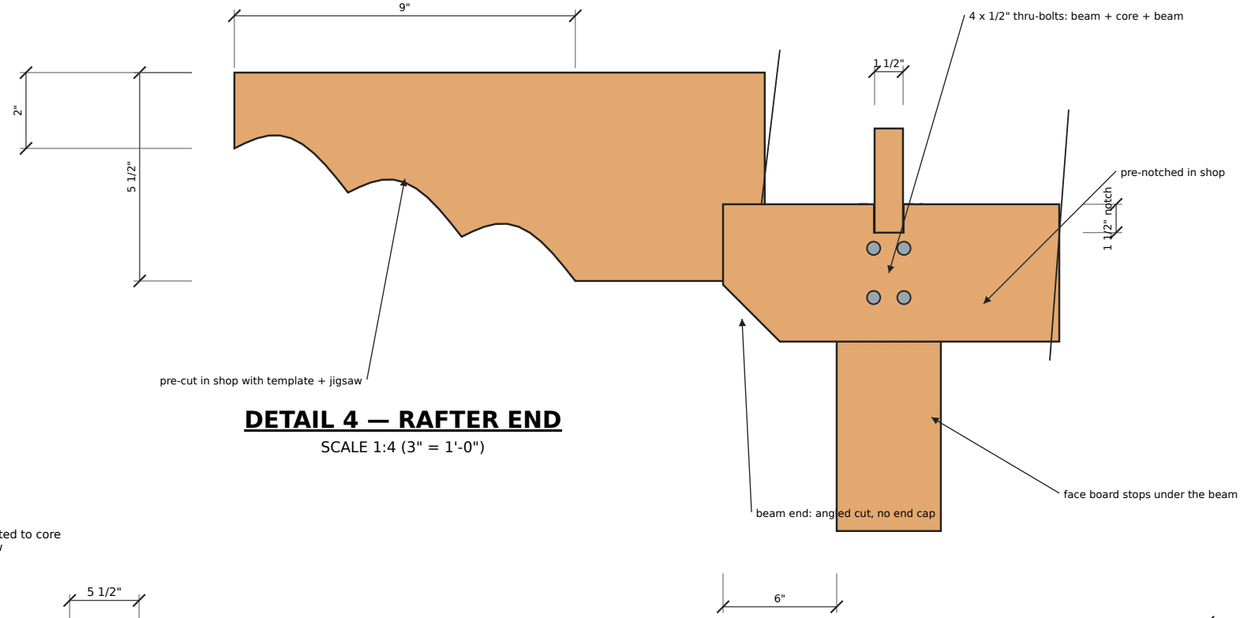


DETAIL 4 — RAFTER END

SCALE 1:4 (3" = 1'-0")

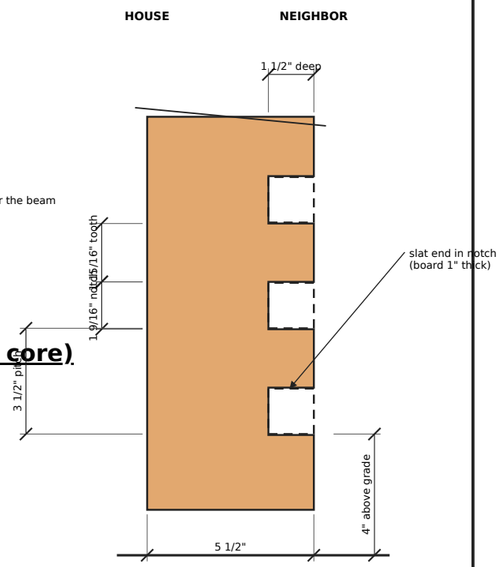

DETAIL 3 — NOTCHED SIDE BOARD (from bay)

SCALE 1:5

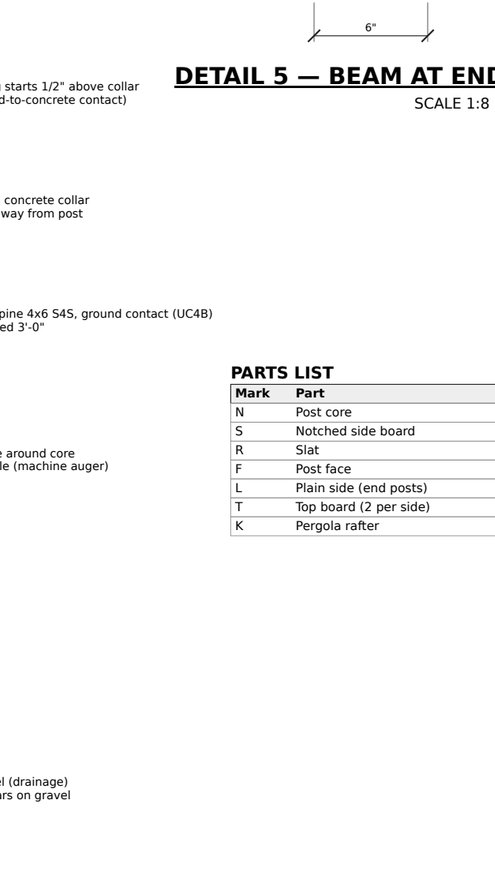

DETAIL 1 — POST FOOTING

SCALE 1:12 (1" = 1'-0")

DETAIL 5 — BEAM AT END POST (bolted to the core)

SCALE 1:8 (1 1/2" = 1'-0")

PARTS LIST

Mark	Part	Material	Qty	Length	Shop pre-cut / notes
N	Post core	PT pine 4x6 S4S, ground contact (UC4B)	7	10'-8"	embed 3'-0"; trim tops on site
S	Notched side board	Cedar 5/4x6 S4S notched	12	7'-5 1/2"	YES: 24 notches
R	Slat	Cedar 2x2 S4S	144	3'-3 1/2"	YES: cut to length (stop block)
F	Post face	Cedar 2x6 S4S	14	6'-10 1/4"	YES: cut to length (stops under beam)
L	Plain side (end posts)	Cedar 5/4x6 S4S plain	2	7'-5 1/2"	YES: cut to length
T	Top board (2 per side)	Cedar 2x8 S4S	4	11'-6 1/2"	YES: notches for rafters
K	Pergola rafter	Cedar 2x6 S4S	13	3'-0"	YES: cloud-lift ends

Kitchen Privacy Screen — 7 posts, cedar, 8 ft, pergola top
(Cornelius, NC) — Bill


Sections and details

Date: 2026-11-10 Rev.: 9 By:

Dimensions in feet/inches. Lumber: actual sizes (2x6 = 1 1/2" x 5 1/2").


Verify all dimensions in the field before cutting. Not a structural design.

A-2

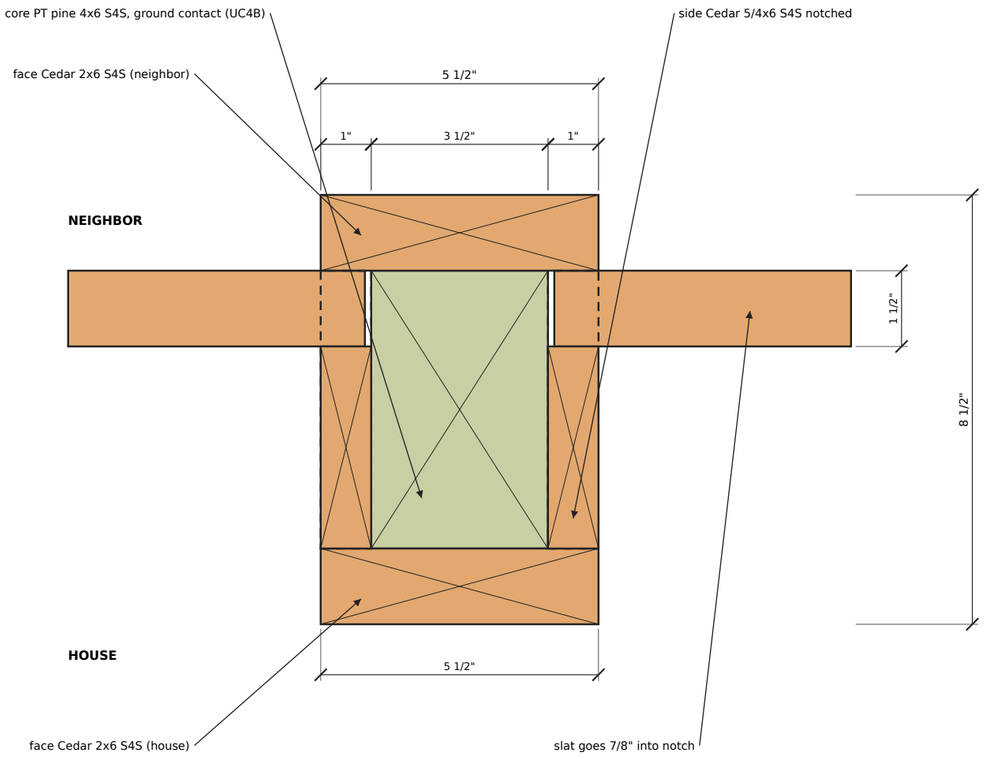

DETAIL 2a — INTERMEDIATE POST, SECTION B-B

SCALE 1:3

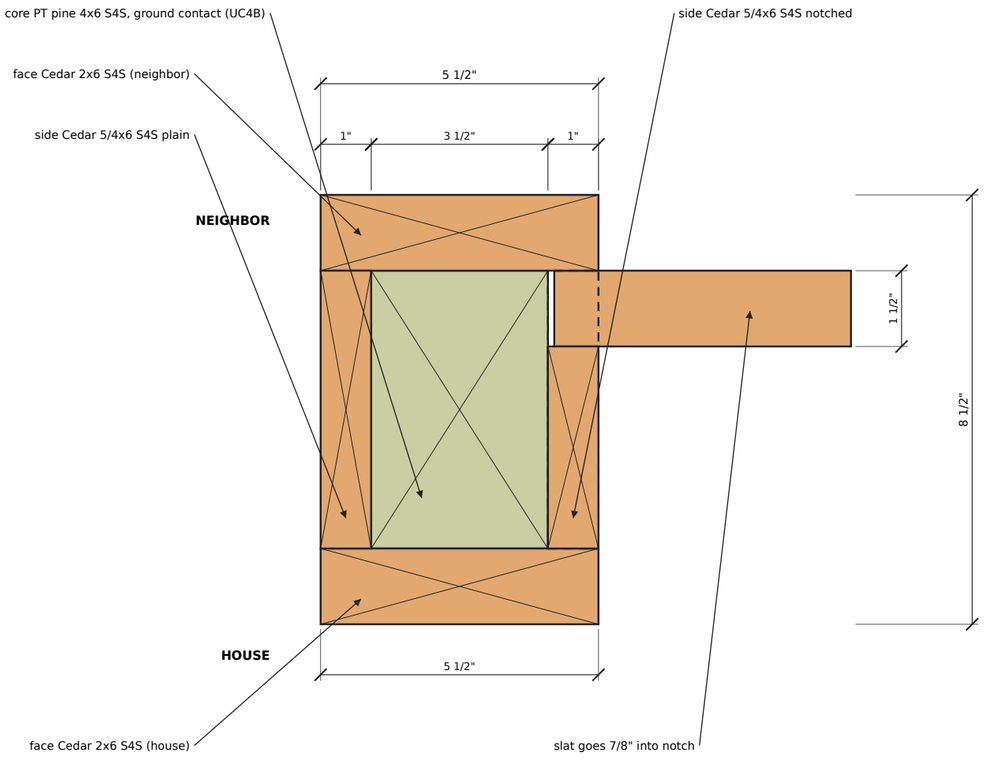

DETAIL 2b — END POST (1 and 7)

SCALE 1:3

#	INSTALLATION SEQUENCE
1	HOLES: lay out 7 post centers at 3'-7 1/4" o.c.; dig Ø16" x 3'-6" with rented machine auger; 6" gravel.
2	POSTS: set PT pine 4x6 S4S, ground contact (UC4B) cores 3'-0" deep, plumb and brace, concrete with sloped collar. Cure 48 h.
3	LEVEL TOPS: cut all cores to 7'-8" above grade (laser level).
4	NOTCHED SIDE BOARDS (pre-cut): fasten to core sides from the neighbor side, notches facing neighbor.
5	SLATS (pre-cut): drop into notches from the neighbor side, bottom to top; 1 screw per end.
6	FRONT CLOSURE: Cedar 2x6 S4S face boards on both faces (closes the notches and locks the slats).
7	SIDE CLOSURE: Cedar 5/4x6 S4S plain on the outer side of end posts 1 and 7.
8	BEAMS (pre-notched): Cedar 2x8 S4S each side, bolted straight to the core above the face boards, 4 x 1/2" thru-bolts per post; splice over post 4.
9	PERGOLA RAFTERS (pre-cut): 13 into top-board notches (posts + mid-bay); hidden trim-head screws.

Kitchen Privacy Screen — 7 posts, cedar, 8 ft, pergola top (Cornelius, NC) — Bill

Clad post (PT core + cladding) and installation

Date: 2026-11-10 Rev.: 9 By:

Dimensions in feet/inches. Lumber: actual sizes (2x6 = 1 1/2" x 5 1/2").

Verify all dimensions in the field before cutting. Not a structural design.

A-3