
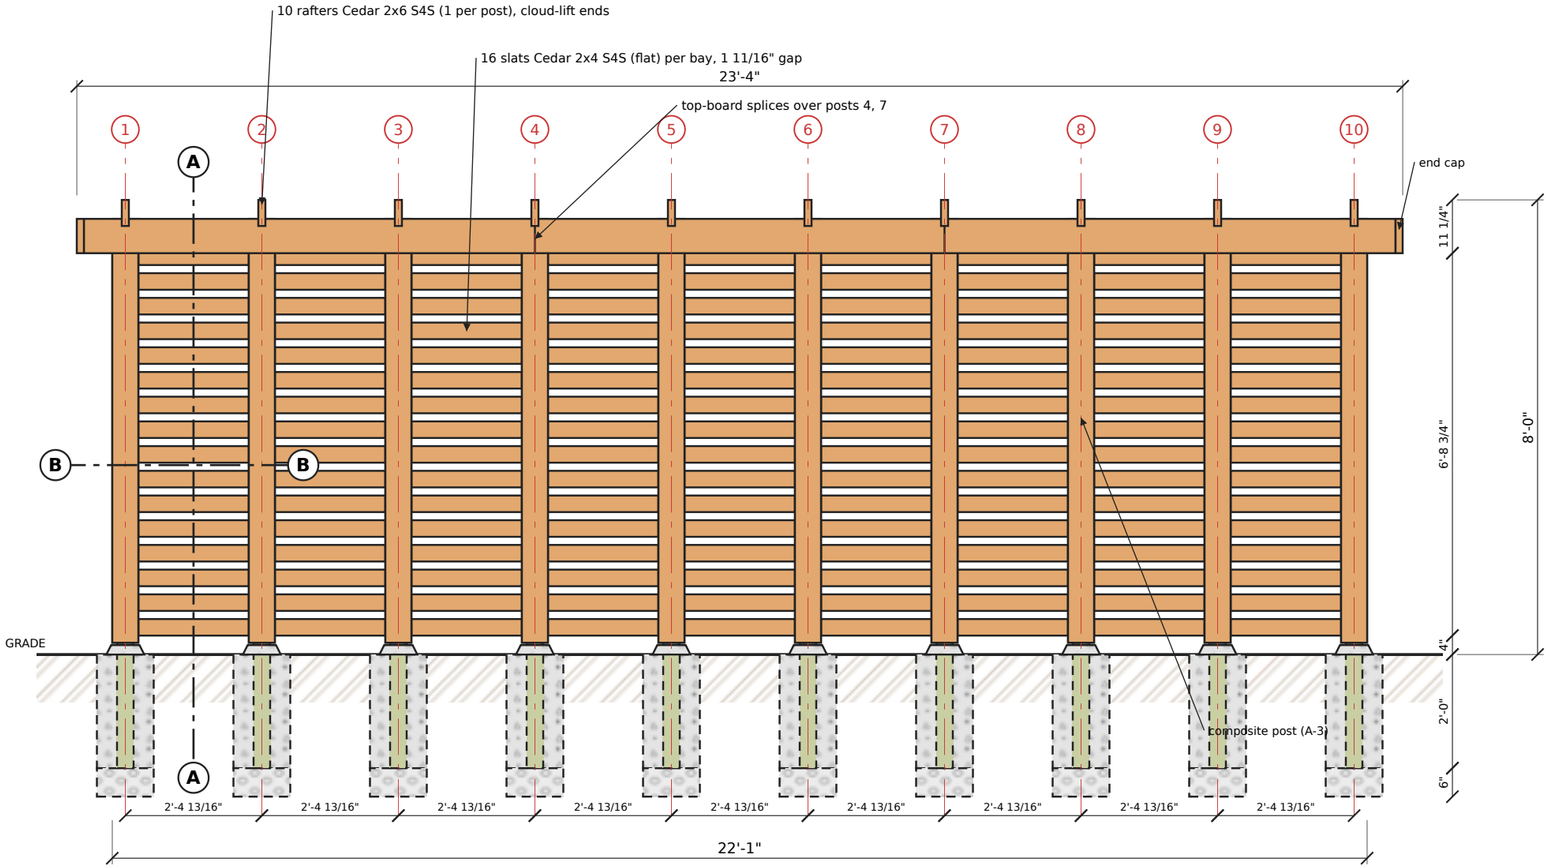




## ELEVATION — NEIGHBOR SIDE

SCALE 1:32 (3/8" = 1'-0")

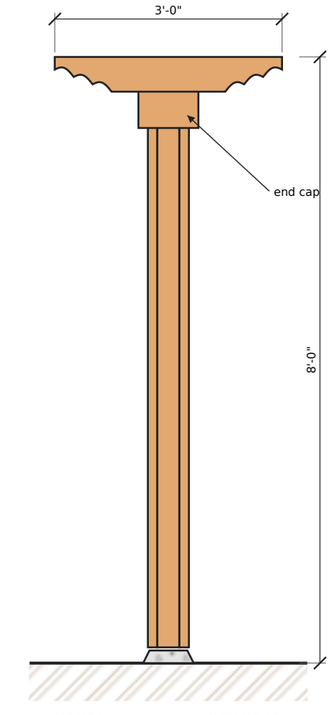


## SIDE ELEVATION (end view)

SCALE 1:24 (1/2" = 1'-0")

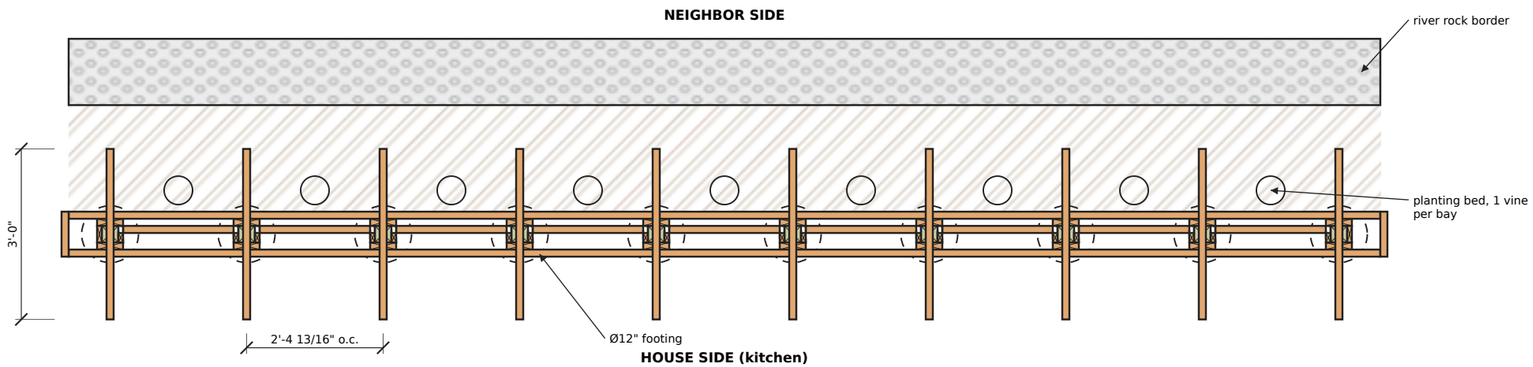


## PLAN — TOP VIEW

SCALE 1:32 (3/8" = 1'-0")

**NOTES**

1. Overall length 22'-1"; 10 posts at 2'-4 13/16" o.c.; clear bay 23 5/16".
2. Bay/post = 4.24 ≈ φ^3 (Fibonacci 55/13); span 23 5/16" < 36" (low warping risk).
3. Post cores embedded 2'-0" in concrete over 6" gravel; holes by machine auger.
4. Call NC811 before digging. Verify property line, setbacks and HOA.
5. Fasteners: coated trim-head deck screws (ACQ-rated), countersunk.
6. 16 slats per bay, 1 11/16" gap set by the notched side boards.
7. All posts 5 1/2" wide, faces flush. Parts marked YES are pre-cut in the shop.
8. Cedar = Western Red Cedar, kiln-dried, S4S (planed 4 sides).
9. PT = Southern Yellow Pine #2, ground contact.

**Kitchen Privacy Screen — 10 posts, cedar with pergola top (Cornelius, NC)**


**Elevation and plan**

Date: 2026-11-10 Rev.: 7 By:

Dimensions in feet/inches. Lumber: actual sizes (2x6 = 1 1/2" x 5 1/2").


Verify all dimensions in the field before cutting. Not a structural design.

**A-1**

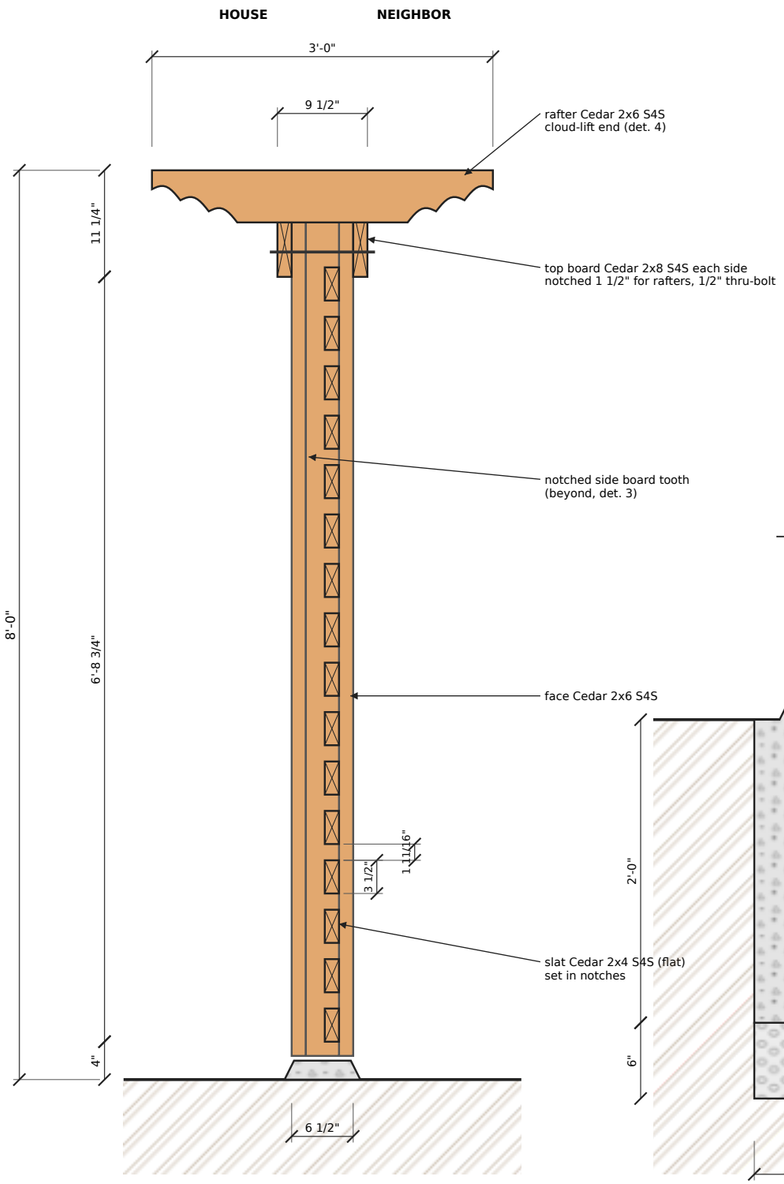



## SECTION A-A (mid-bay, looking at post 1)

SCALE 1:16 (3/4" = 1'-0")

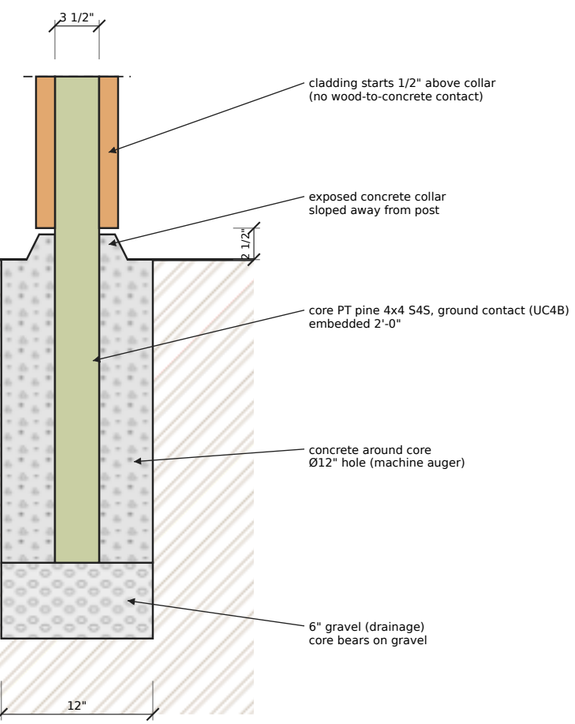



## DETAIL 1 — POST FOOTING

SCALE 1:12 (1" = 1'-0")

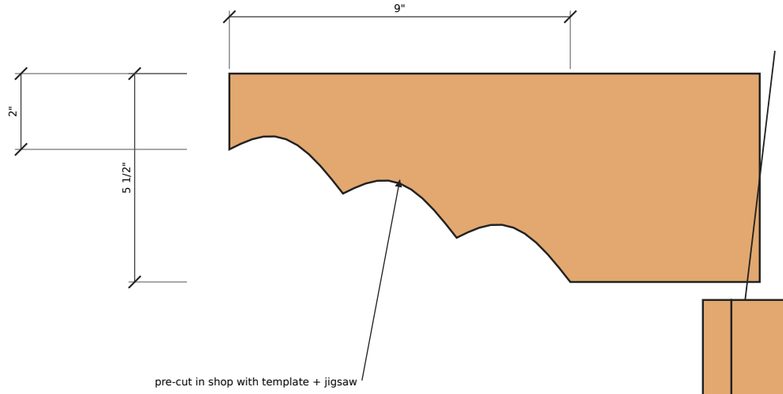



## DETAIL 4 — RAFTER END

SCALE 1:4 (3" = 1'-0")

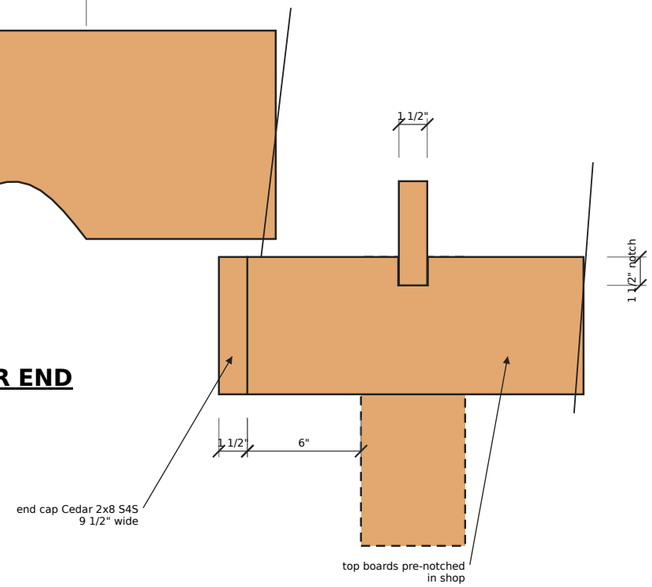


## DETAIL 5 — TOP BOARD END: NOTCH + END CAP

SCALE 1:8 (1 1/2" = 1'-0")

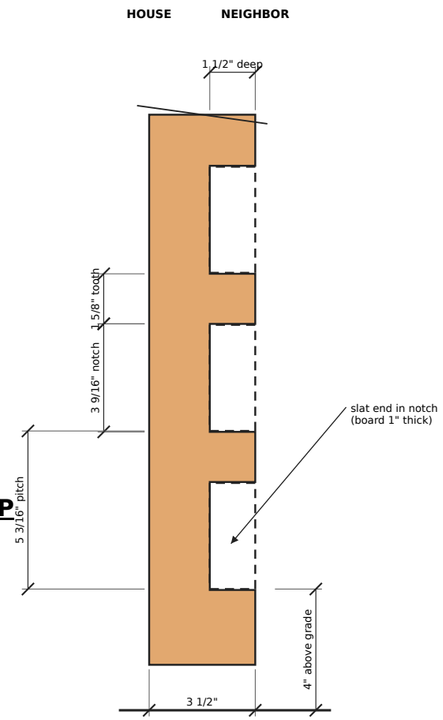


## DETAIL 3 — NOTCHED SIDE BOARD (from bay)

SCALE 1:5

**PARTS LIST**

| Mark | Part | Material | Qty | Length | Shop pre-cut / notes |
|---|---|---|---|---|---|
| N | Post core | PT pine 4x4 S4S, ground contact (UC4B) | 10 | 9'-8" | embed 2'-0"; trim tops on site |
| S | Notched side board | Cedar 5/4 S4S (1") notched | 18 | 7'-5 1/2" | YES: rip to 3 1/2", 16 notches |
| R | Slat | Cedar 2x4 S4S (flat) | 144 | 2'-1 1/16" | YES: cut to length (stop block) |
| F | Post face | Cedar 2x6 S4S | 20 | 7'-5 1/2" | YES: cut to length |
| L | Plain side (end posts) | Cedar 5/4 S4S (1") plain | 2 | 7'-5 1/2" | YES: rip to 3 1/2" |
| T | Top board (3 per side) | Cedar 2x8 S4S | 6 | 7'-11 1/4", 7'-2 1/2" | YES: notches for rafters |
| E | Top board end cap | Cedar 2x8 S4S | 2 | 9 1/2" | YES |
| K | Pergola rafter | Cedar 2x6 S4S | 10 | 3'-0" | YES: cloud-lift ends |

**Kitchen Privacy Screen — 10 posts, cedar with pergola top (Cornelius, NC)**


## Sections and details

Date: 2026-11-10 Rev.: 7 By:

Dimensions in feet/inches. Lumber: actual sizes (2x6 = 1 1/2" x 5 1/2").


Verify all dimensions in the field before cutting. Not a structural design.

**A-2**

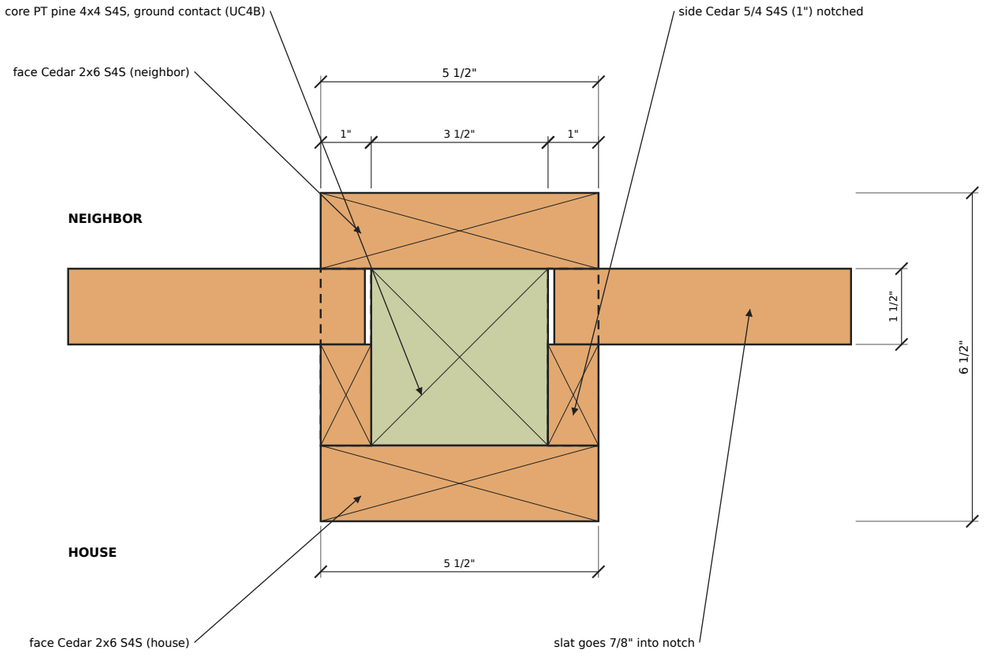


## DETAIL 2a — INTERMEDIATE POST, SECTION B-B

SCALE 1:3

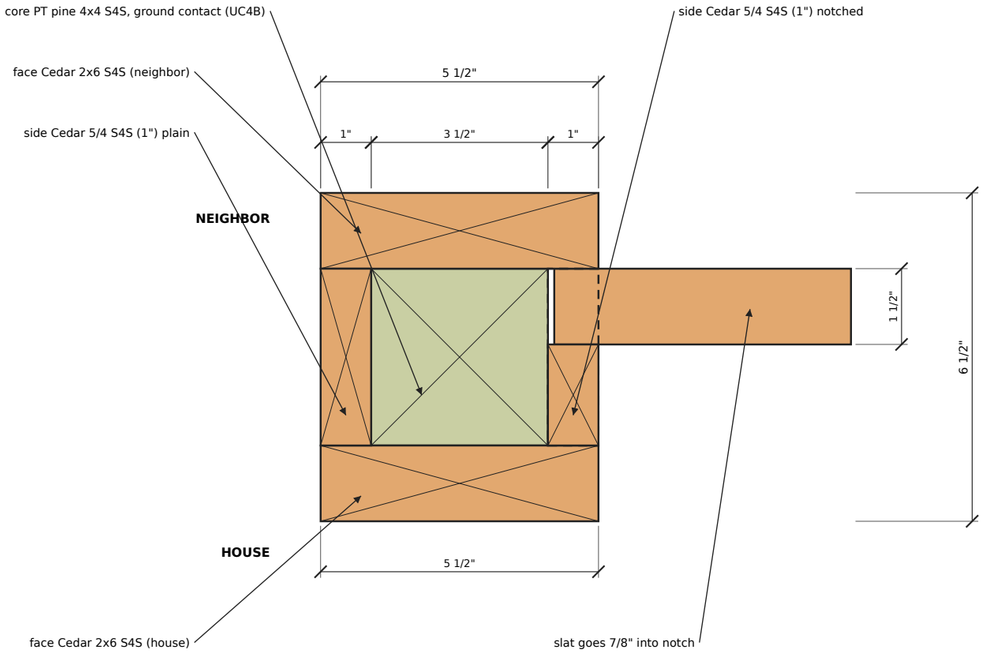


## DETAIL 2b — END POST (1 and 10)

SCALE 1:3

| # | INSTALLATION SEQUENCE |
|---|---|
| 1 | HOLES: lay out 10 post centers at 2'-4 13/16" o.c.; dig Ø12" x 2'-6" with rented machine auger; 6" gravel. |
| 2 | POSTS: set PT 4x4 cores 2'-0" deep, plumb and brace, pour concrete with sloped collar. Cure 48 h. |
| 3 | LEVEL TOPS: cut all cores to 7'-8" above grade (laser level). |
| 4 | NOTCHED SIDE BOARDS (pre-cut): fasten to core sides from the neighbor side, notches facing neighbor. |
| 5 | SLATS (pre-cut): drop into notches from the neighbor side, bottom to top; 1 screw per end. |
| 6 | FRONT CLOSURE: 2x6 face boards on both faces (closes the notches and locks the slats). |
| 7 | SIDE CLOSURE: 1" plain side board on the outer side of end posts 1 and 10. |
| 8 | TOP BOARDS (pre-notched): 2x8 each side of the posts, 1/2" thru-bolt per post; splices over posts 4, 7. |
| 9 | END CAPS (pre-cut): close the ends of the top boards for a solid-beam look. |
| 10 | PERGOLA RAFTERS (pre-cut): drop into top-board notches, 1 per post; hidden trim-head screws. |

**Kitchen Privacy Screen — 10 posts, cedar with pergola top (Cornelius, NC)**

## Composite post and installation

Date: 2026-11-10 Rev.: 7 By:

Dimensions in feet/inches. Lumber: actual sizes (2x6 = 1 1/2" x 5 1/2").

Verify all dimensions in the field before cutting. Not a structural design.

**A-3**